
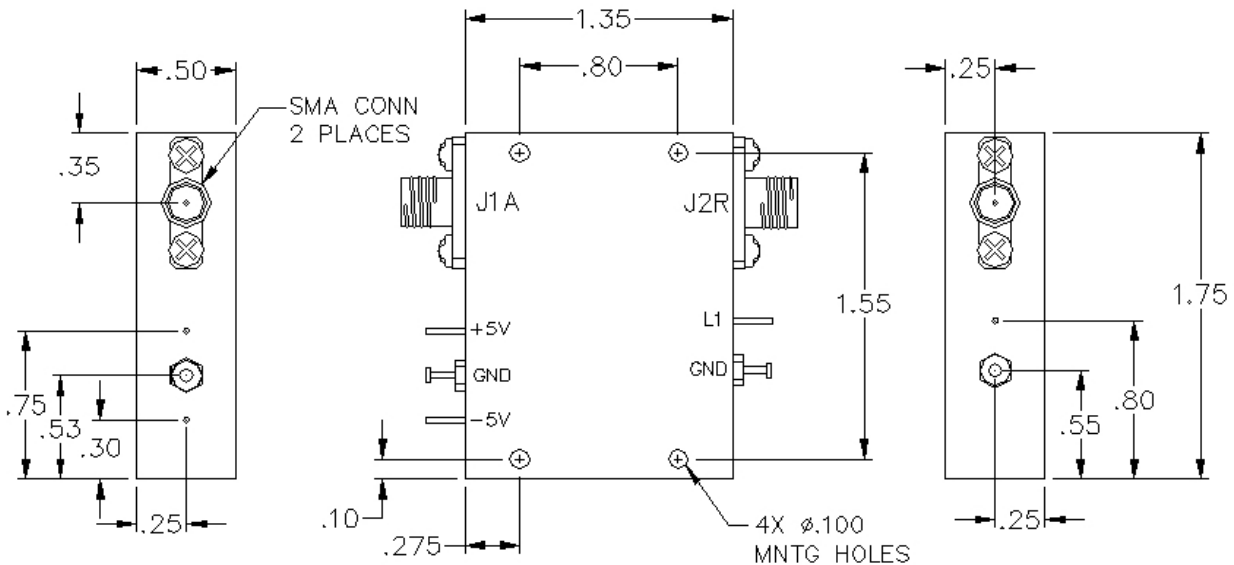


SW1AD-33

SPST SMA ABSORPTIVE SWITCH



SPECIFICATIONS

| | |
|------------------------|-----------------|
| Name: | SW1AD-33 |
| Input Frequency Range: | 0.3-18 GHz |
| Switch Type: | SP1T |
| Insertion Loss: | 3.7 dB max. |
| Input Power: | 200 mw / 23 dBm |
| Isolation: | 55 dB min. |
| VSWR: | 1.80:1 |
| Switching Time: | 100 nsec |
| Connector Type: | SMA |

TTL CONTROL LOGIC

| L1 | J1-J2 |
|----|----------------|
| 0 | Insertion Loss |
| 1 | Isolation |

This is a commercial off the shelf (COTS) product.
For an equivalent product that meets DFARS materials compliance, contact sales.
All specifications are subject to change without notice at any time. Rev: 170201