
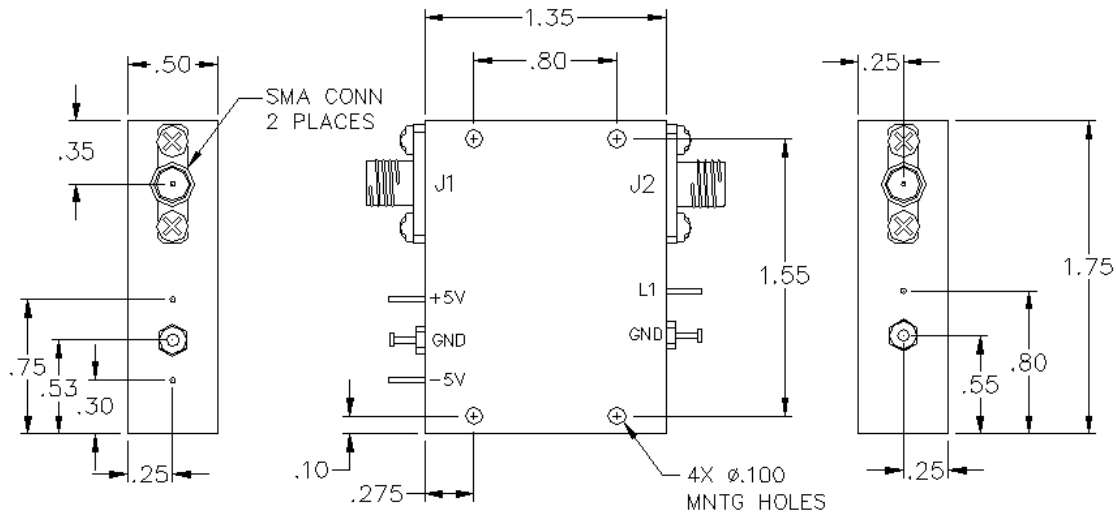


# SW1RD-31

## SPST SMA REFLECTIVE SWITCH



## SPECIFICATIONS

Name:	SW1RD-31
Input Frequency Range:	0.04-9 GHz
Switch Type:	SP1T
Insertion Loss:	2.5 dB max.
Input Power:	200 mw / 23 dBm
Isolation:	70 dB min.
VSWR:	2.00:1
Switching Time:	100 nsec
Connector Type:	SMA

## TTL CONTROL LOGIC

L1	J1-J2
0	Insertion Loss
1	Isolation

This is a commercial off the shelf (COTS) product.  
For an equivalent product that meets DFARS materials compliance, contact sales.  
All specifications are subject to change without notice at any time. Rev: 170201