


SMA DIRECTIONAL COUPLER

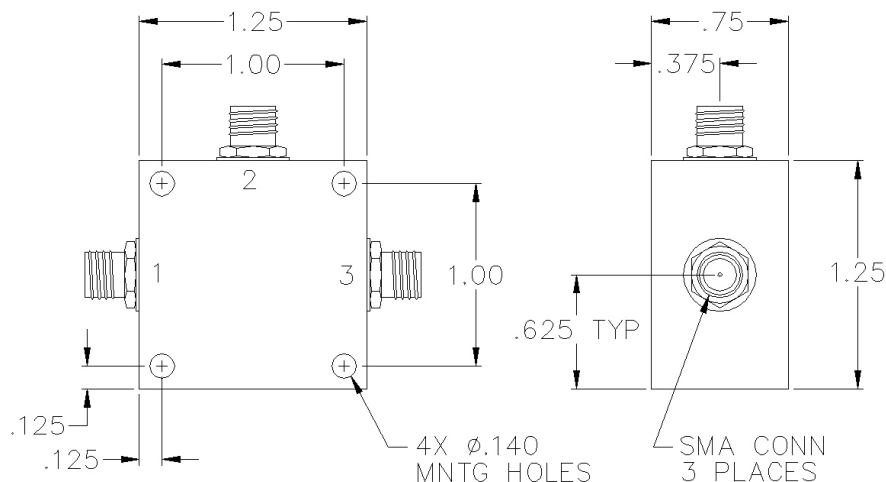

SPECIFICATIONS

Name:	C0-08-411
Frequency Range:	10-1000 MHz
Coupling:	6.5 ± 0.5 dB
Coupling Flatness:	±0.50 dB max.
Insertion Loss:	2.5 dB max.
Directivity:	16 dB min.
VSWR:	1.50:1 max.
Input Power:	1 watts max.
Connector Type:	SMA

PORT CONFIGURATION

Input: 1
Output: 3
Coupled: 2
Ground: Housing

Insertion loss does not include coupling loss.

Input power is specified for load VSWR better than 1.20:1.

SMA female connectors standard, also available with BNC, TNC, F, and N connectors.

Dual directional couplers, other frequency ranges, coupling values and higher power models available.

This is a commercial off the shelf (COTS) product.

For an equivalent product that meets DFARS materials compliance, contact sales.

All specifications are subject to change without notice at any time. Rev: 220628

PULSAR
MICROWAVE CORPORATION