
## **SMA DIRECTIONAL COUPLER**



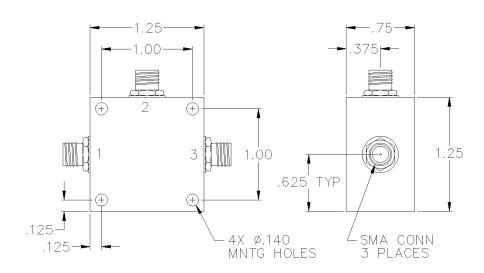

Name: C2-01-411 Frequency Range: 0.3-50 MHz

 $11.5 \pm 0.5 \, dB$ Coupling:

±0.25 dB max. Coupling Flatness:

Insertion Loss: 1.2 dB max. Directivity: 30 dB min. VSWR: 1.20:1 max. Input Power: 1 watts max.

Connector Type: **SMA** 

## PORT CONFIGURATION

Input: 1

Output: 3 2

Coupled:

Ground: Housing

Insertion loss does not include coupling loss.

Input power is specified for load VSWR better than 1.20:1.

SMA female connectors standard, also available with BNC, TNC, F, and N connectors.

Dual directional couplers, other frequency ranges, coupling values and higher power models available.

This is a commercial off the shelf (COTS) product.

For an equivalent product that meets DFARS materials compliance, contact sales. All specifications are subject to change without notice at any time. Rev: 220628

