
## **SMA DIRECTIONAL COUPLER**



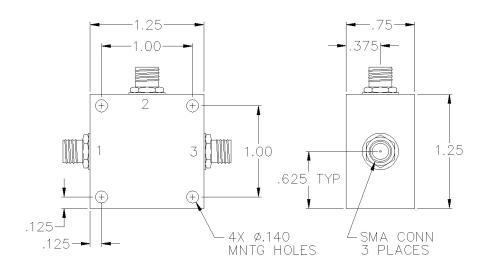

## SPECIFICATIONS

 Name:
 C3-P2-411

 Frequency Range:
 0.01-35 MHz

 Coupling:
 15.0 ± 0.5 dB

Coupling Flatness: ±0.30 dB max.

Insertion Loss: 0.6 dB max.

Directivity: 25 dB min.

VSWR: 1.30:1 max.

Input Power: 10 watts max.

Connector Type: SMA

## PORT CONFIGURATION

Input: 1
Output: 3
Coupled: 2

Ground: Housing

Insertion loss does not include coupling loss.

Input power is specified for load VSWR better than 1.20:1.

SMA female connectors standard, also available with BNC, TNC, F, and N connectors.

Dual directional couplers, other frequency ranges, coupling values and higher power models available.

This is a commercial off the shelf (COTS) product.

For an equivalent product that meets DFARS materials compliance, contact sales. All specifications are subject to change without notice at any time. Rev: 220628

