


# C35-30-481/9N

## HIGH POWER 35 DB TYPE N DIRECTIONAL COUPLER

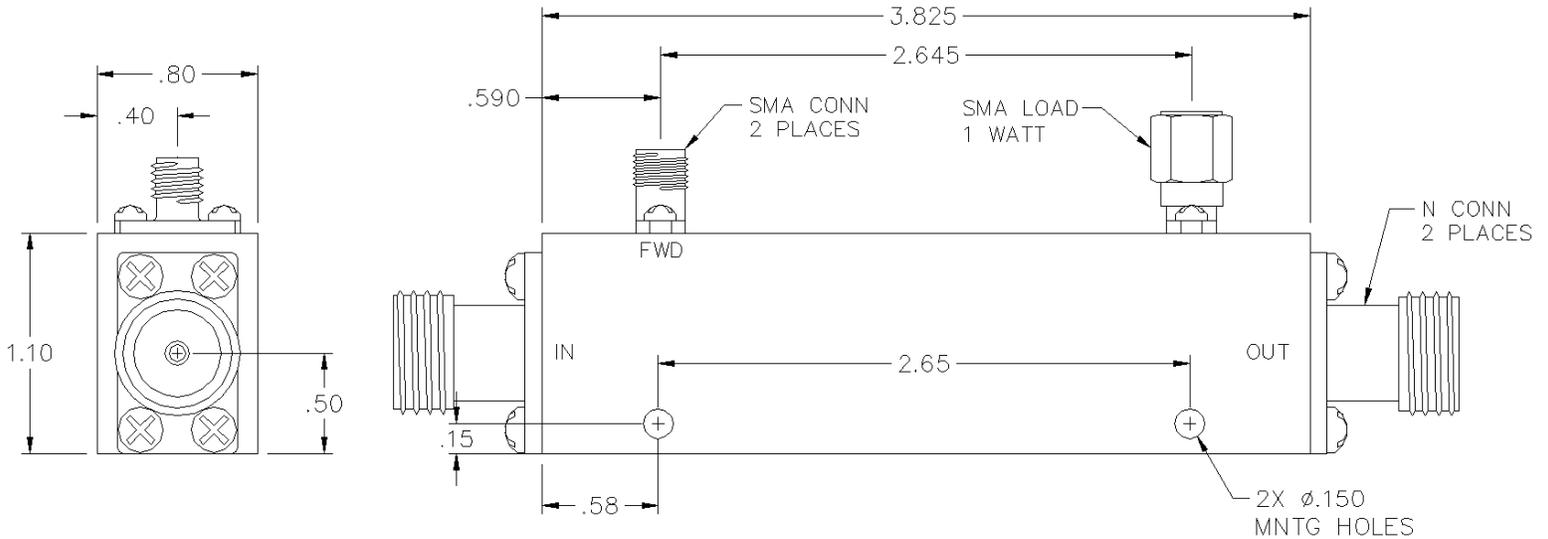

## SPECIFICATIONS

Name:	C35-30-481/9N
Frequency Range:	2000-4000 MHz
Coupling:	35.0 $\pm$ 1.00 dB
Coupling Flatness:	$\pm$ 1.00 dB max.
Insertion Loss:	0.20 dB max.
Directivity:	20 dB min.
VSWR In/Out:	1.20:1 max.
Input Power:	600 watts max.
Connector Type:	N

Insertion loss does not include coupling loss.  
Input power is specified for load VSWR better than 1.20:1.

This is a commercial off the shelf (COTS) product.  
For an equivalent product that meets DFARS materials compliance, contact sales.  
All specifications are subject to change without notice at any time. Rev: 220628

