


C40-21-481/4N

HIGH POWER 40 DB TYPE N DUAL DIRECTIONAL COUPLER

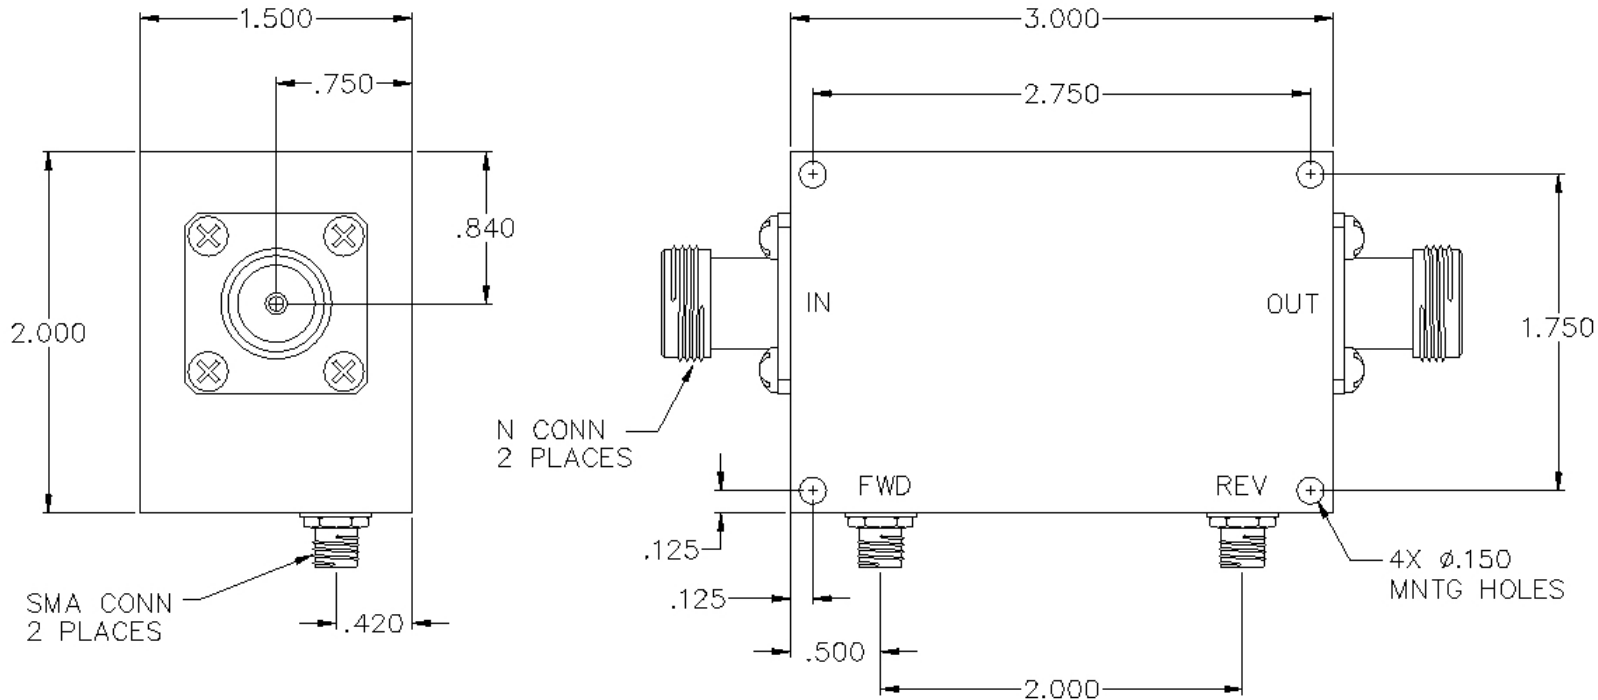

SPECIFICATIONS

Name:	C40-21-481/4N
Frequency Range:	50-500 MHz
Coupling:	40.0 \pm 1.00 dB
Coupling Flatness:	\pm 1.00 dB max.
Insertion Loss:	0.20 dB max.
Directivity:	20 dB min.
VSWR In/Out:	1.15:1 max.
Input Power:	500 watts max.
Connector Type:	N

Insertion loss does not include coupling loss.
Input power is specified for load VSWR better than 1.20:1.

This is a commercial off the shelf (COTS) product.
For an equivalent product that meets DFARS materials compliance, contact sales.
All specifications are subject to change without notice at any time. Rev: 220628

www.pulsarmicrowave.com · 48 Industrial St West, Clifton NJ 07012 · Tel: 973-779-6262 · Fax: 973-779-2727 · sales@pulsarmicrowave.com

PULSAR
MICROWAVE CORPORATION