


# P2-01-450/4S

## 2-WAY POWER DIVIDER

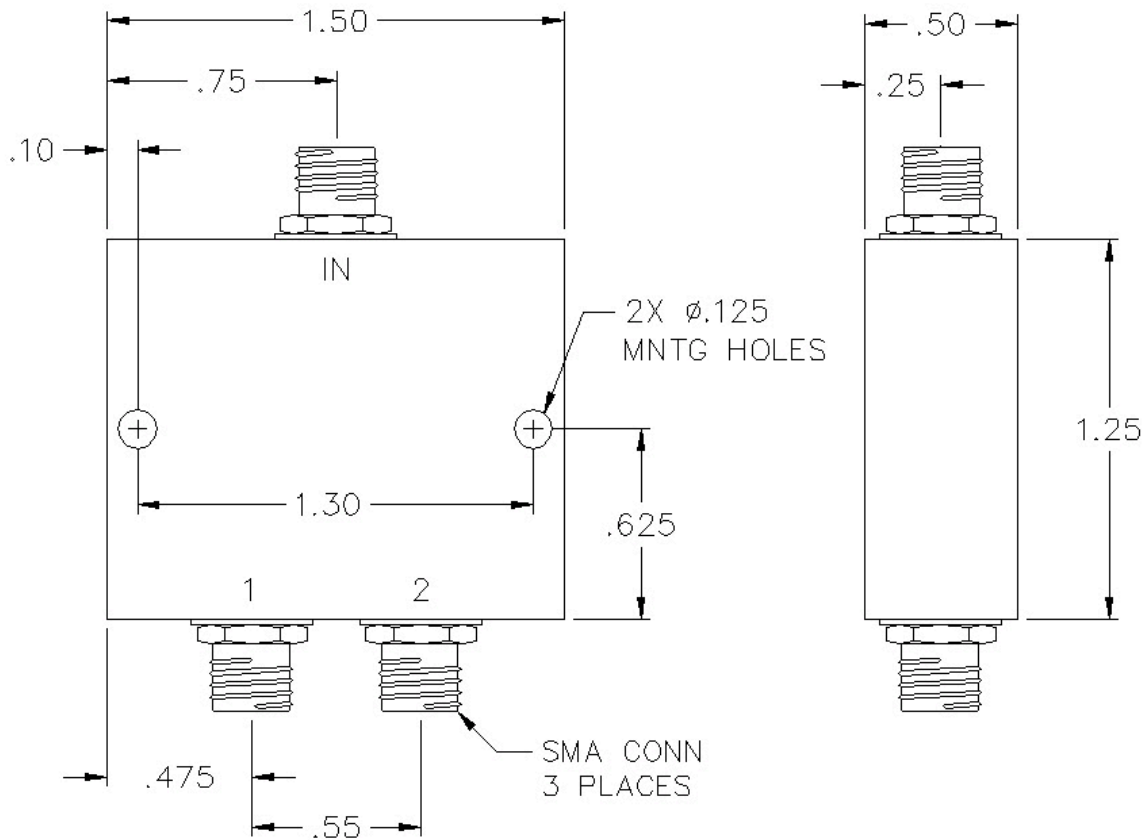

## SPECIFICATIONS

|                    |              |
|--------------------|--------------|
| Name:              | P2-01-450/4S |
| Frequency Range:   | 0.004-60 MHz |
| Insertion Loss:    | 0.8 dB max.  |
| Isolation:         | 25 dB min.   |
| Amplitude Balance: | 0.1 dB max.  |
| Phase Balance:     | 1° max.      |
| VSWR:              | 1.30:1 max.  |
| Input Power:       | 1 watts max. |
| Package Type:      | SMA          |

Input power is specified for load VSWR better than 1.20:1.  
75 Ohm and higher power models available, contact sales.

This is a commercial off the shelf (COTS) product.

For an equivalent product that meets DFARS materials compliance, contact sales.

All specifications are subject to change without notice at any time. Rev: 250614