
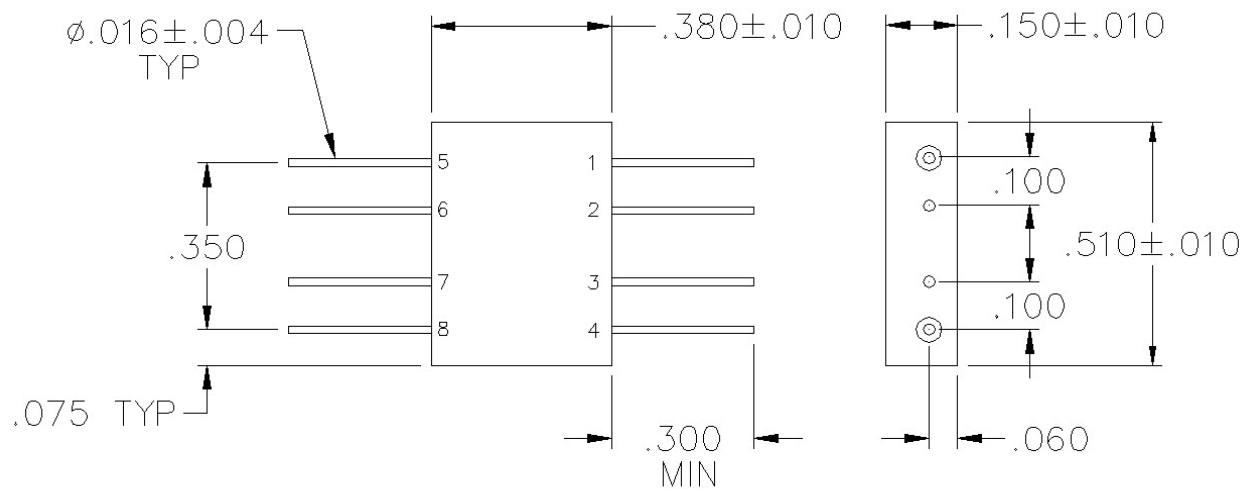


P2-04-301

2-WAY FLATPACK POWER DIVIDER



SPECIFICATIONS

Name:	P2-04-301
Frequency Range:	0.5-300 MHz
Insertion Loss:	0.7 dB max.
Isolation:	20 dB min.
Amplitude Balance:	0.3 dB max.
Phase Balance:	2° max.
VSWR:	1.30:1 max.
Input Power:	1 watts max.
Package Type:	Pin

PORT CONFIGURATION

Input:	8
Output:	5, 1
Ground:	2-4, 6-7

Input power is specified for load VSWR better than 1.20:1.
75 Ohm and higher power models available, contact sales.

This is a commercial off the shelf (COTS) product.

For an equivalent product that meets DFARS materials compliance, contact sales.

All specifications are subject to change without notice at any time. Rev: 250512

www.pulsarmicrowave.com · 48 Industrial St West, Clifton NJ 07012 · Tel: 973-779-6262 · Fax: 973-779-2727 · sales@pulsarmicrowave.com

PULSAR
MICROWAVE CORPORATION