


# P4-04-E

## 4-WAY SURFACE MOUNT POWER DIVIDER

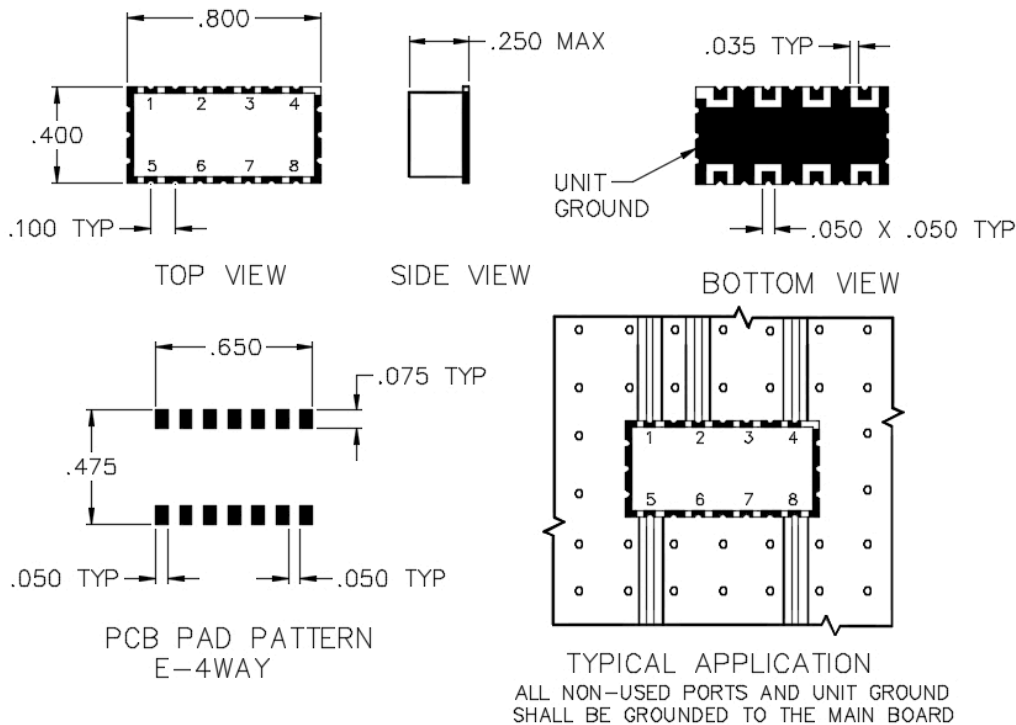

## SPECIFICATIONS

Name:	P4-04-E
Frequency Range:	1-500 MHz
Insertion Loss:	1.0 dB max.
Isolation:	22 dB min.
Amplitude Balance:	0.4 dB max.
Phase Balance:	3° max.
VSWR:	1.35:1 max.
Input Power:	1 watts max.
Package Type:	Surface

Input power is specified for load VSWR better than 1.20:1.  
75 Ohm and higher power models available, contact sales.

## PORT CONFIGURATION

Input:	2
Output:	1, 4, 5, 8
Ground:	3, 6, 7

This is a commercial off the shelf (COTS) product.

For an equivalent product that meets DFARS materials compliance, contact sales.

All specifications are subject to change without notice at any time. Rev: 250512