# P4-P09-440

## 4-WAY HIGH POWER COMBINER

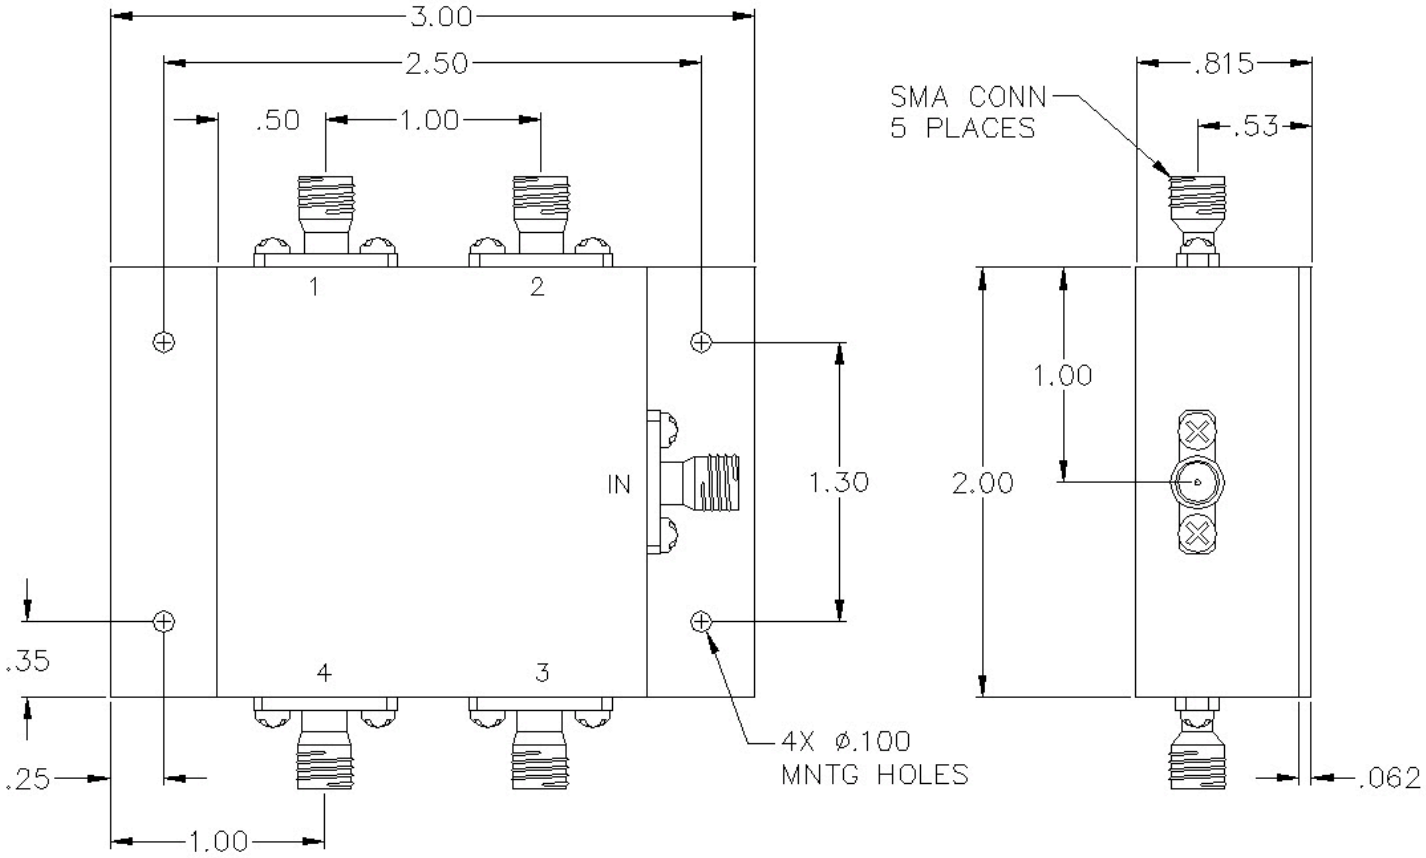


## SPECIFICATIONS

| | |
|---|---|
| Name: | P4-P09-440 |
| Frequency Range: | 30-1100 MHz |
| Insertion Loss: | 1.5 dB max. |
| Isolation: | 20 dB min. |
| Max Power at Combined Port: | 25 watts |
| Amplitude Balance: | 0.3 dB max. |
| Phase Balance: | 4° max. |
| VSWR: | 1.50:1 max. |
| Package Type: | SMA |

Available with SMA or N connectors.

This is a commercial off the shelf (COTS) product.
For an equivalent product that meets DFARS materials compliance, contact sales.
All specifications are subject to change without notice at any time. Rev: 250614

www.pulsarmicrowave.com · 48 Industrial St West, Clifton NJ 07012 · Tel: 973-779-6262 · Fax: 973-779-2727 · sales@pulsarmicrowave.com