
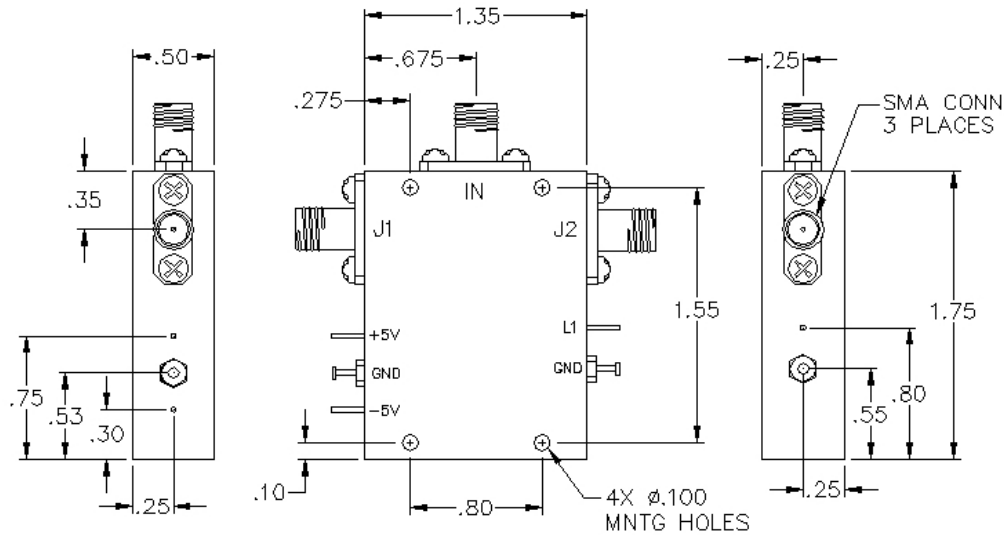


# SW2RD-33

## SPDT SMA REFLECTIVE SWITCH



## SPECIFICATIONS

|                        |                 |
|------------------------|-----------------|
| Name:                  | SW2RD-33        |
| Input Frequency Range: | 0.3-18 GHz      |
| Switch Type:           | SP2T            |
| Insertion Loss:        | 3.5 dB max.     |
| Input Power:           | 200 mw / 23 dBm |
| Isolation:             | 55 dB min.      |
| VSWR:                  | 2.00:1          |
| Switching Time:        | 100 nsec        |
| Connector Type:        | SMA             |

## TTL CONTROL LOGIC

| L1 | IN-J1          | IN-J2          |
|----|----------------|----------------|
| 0  | Insertion Loss | Isolation      |
| 1  | Isolation      | Insertion Loss |

This is a commercial off the shelf (COTS) product.  
For an equivalent product that meets DFARS materials compliance, contact sales.  
All specifications are subject to change without notice at any time. Rev: 170201