
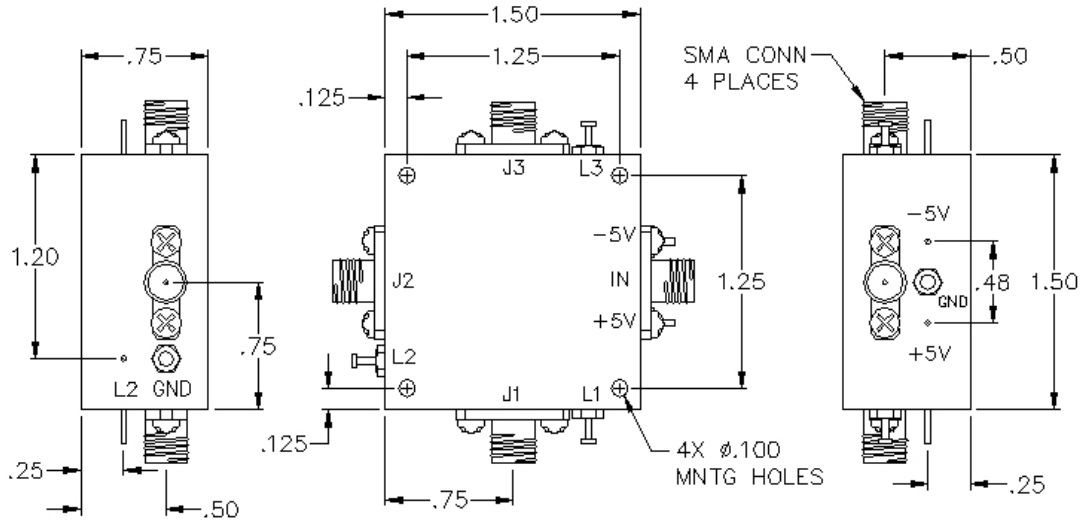


SW3AD-24

SP3T SMA ABSORPTIVE SWITCH



SPECIFICATIONS

| | |
|------------------------|-----------------|
| Name: | SW3AD-24 |
| Input Frequency Range: | 0.5-2 GHz |
| Switch Type: | SP3T |
| Insertion Loss: | 1.8 dB max. |
| Input Power: | 200 mw / 23 dBm |
| Isolation: | 60 dB min. |
| VSWR: | 1.60:1 |
| Switching Time: | 100 nsec |
| Connector Type: | SMA |

TTL CONTROL LOGIC

| L1 | L2 | L3 | IN-J1 | IN-J2 | IN-J3 |
|----|----|----|----------------|----------------|----------------|
| 0 | 1 | 1 | Insertion Loss | Isolation | Isolation |
| 1 | 0 | 1 | Isolation | Insertion Loss | Isolation |
| 1 | 1 | 0 | Isolation | Isolation | Insertion Loss |

This is a commercial off the shelf (COTS) product.
For an equivalent product that meets DFARS materials compliance, contact sales.
All specifications are subject to change without notice at any time. Rev: 170201

