


XL-10-A

AC COUPLED SURFACE MOUNT TRIPLE BALANCED MIXER

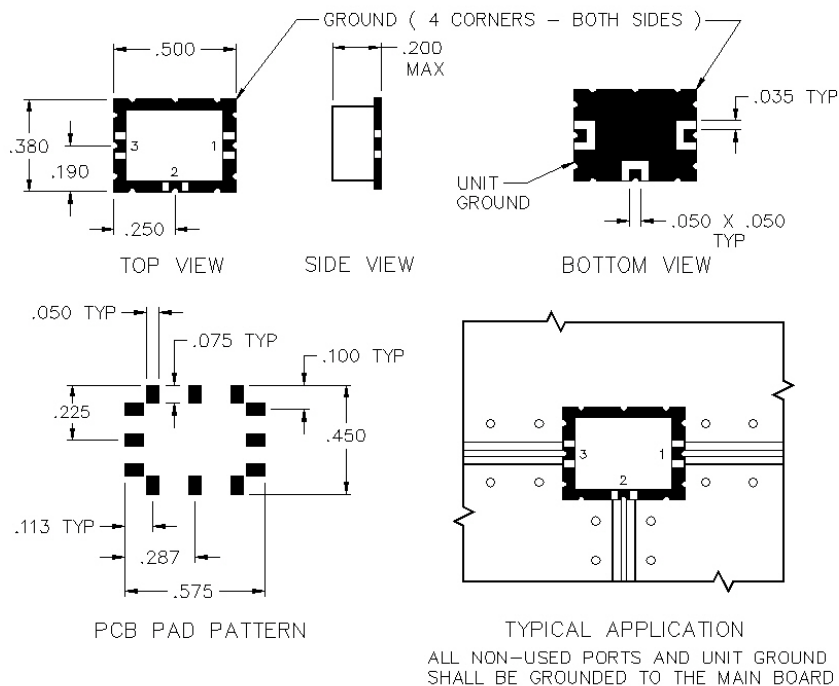

SPECIFICATIONS

Name:	XL-10-A
Frequency Range:	
LO/RF:	5-5000 MHz
IF:	5-3000 MHz
LO Drive:	+10 dBm
Conversion Loss:	9.9 dB max.
1 dB Compression Point:	+4 dBm typ.
Isolation:	
L/R:	25 dB min.
L/I:	20 dB min.
Connector Type:	Surface

PORT CONFIGURATION

RF:	1
LO:	3
IF:	2
Ground:	All Others

IF polarity is negative for DC coupled mixers.

This is a commercial off the shelf (COTS) product.
For an equivalent product that meets DFARS materials compliance, contact sales.
All specifications are subject to change without notice at any time. Rev: 190326

