
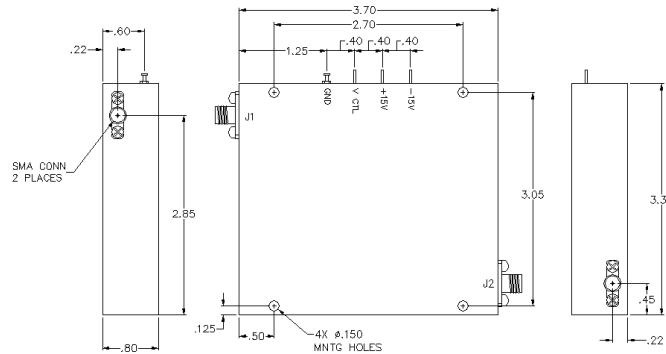


# AAT-15-479A/7S

## VOLTAGE CONTROLLED LINEARIZED ATTENUATOR



### SPECIFICATIONS

Name: AAT-15-479A/7S  
Frequency Range: 0.5-2 GHz  
Attenuation Range: 64 dB  
Insertion Loss: 3.5 dB max.  
VSWR: 1.80:1 max.  
Connector Type: SMA

Transfer Function:  
8 dB/Volt Typical for 32 dB attenuation range.  
16 dB/Volt Typical for 64 dB attenuation range.

Typical Switching Speed: 600 nsec  
Operating Power:  $\leq 0$  dBm  
Power Handling: +27 dBm max.  
Operating Temperature:  $-25^{\circ}\text{C}$  to  $+80^{\circ}\text{C}$   
DC Supply:  
+12 to +15 Volts @ 100mA Typical.  
-12 to -15 Volts @ 50mA Typical.

Harmonic distortion is affected by input power and frequency.  
Typical distortion is 50 dBc for input power less than 0.0 dBm.  
Two tone intermodulation products are typically 54 dBc for input power less than 0.0 dBm.

These attenuators are bi-directional: Either SMA connector can be used as input.

This is a commercial off the shelf (COTS) product.  
For an equivalent product that meets DFARS materials compliance, contact sales.  
All specifications are subject to change without notice at any time. Rev: 160615

www.pulsarmicrowave.com · 48 Industrial St West, Clifton NJ 07012 · Tel: 973-779-6262 · Fax: 973-779-2727 · sales@pulsarmicrowave.com

### ATTENUATOR ACCURACY VS. FREQUENCY

Bandwidth (2:1)		Bandwidth (4:1)	
Flatness (dB)	Attenuation (dB)	Flatness (dB)	Attenuation (dB)
$\pm 0.5$	0-10	$\pm 0.6$	0-10
$\pm 0.8$	0-20	$\pm 1.2$	0-20
$\pm 1.2$	0-30	$\pm 1.8$	0-30
$\pm 1.5$	0-40	$\pm 2.2$	0-40
$\pm 2.2$	0-64	$\pm 3.5$	0-64

