


BBT-06-463A/2

SMA DC BLOCK

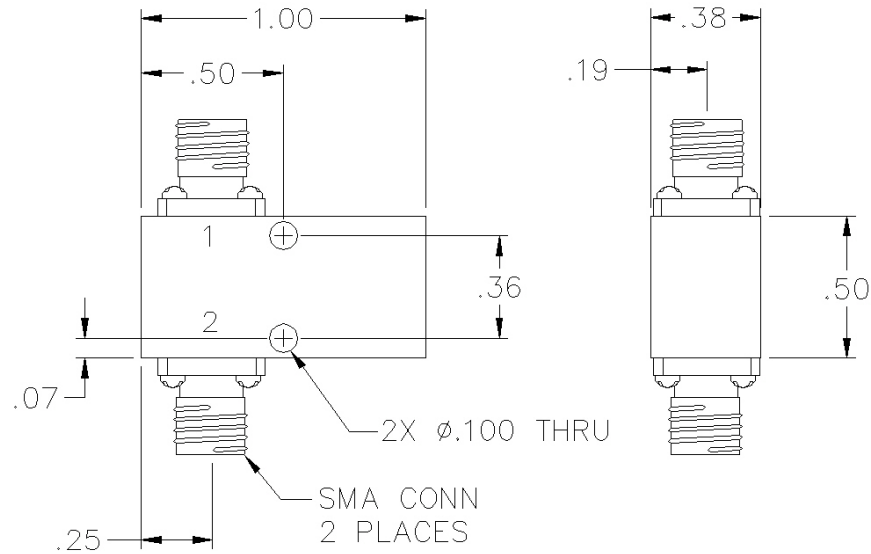

SPECIFICATIONS

Name:	BBT-06-463A/2
Frequency Range:	6-12.4 GHz
Insertion Loss:	0.5 dB max.
Voltage:	100 volts max.
VSWR:	1.40:1 max.
Connector Type:	SMA

This is a commercial off the shelf (COTS) product.

For an equivalent product that meets DFARS materials compliance, contact sales.

All specifications are subject to change without notice at any time. Rev: 220627

www.pulsarmicrowave.com · 48 Industrial St West, Clifton NJ 07012 · Tel: 973-779-6262 · Fax: 973-779-2727 · sales@pulsarmicrowave.com

PULSAR
MICROWAVE CORPORATION