# BT-22-410F

## SMA BIAS TEE




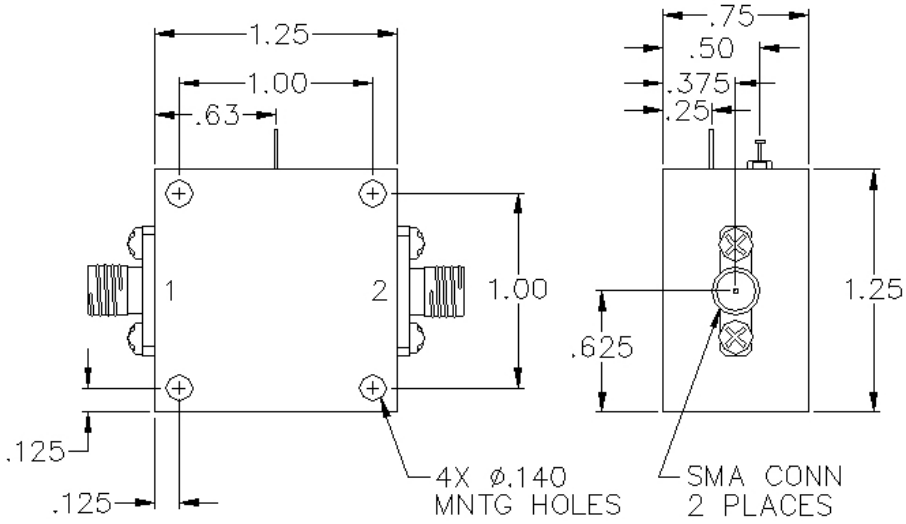


## SPECIFICATIONS

| | |
|---|---|
| Name: | BT-22-410F |
| Frequency Range: | 1700-2000 MHz |
| Insertion Loss: | 0.5 dB max. |
| Current: | 5000 mA max. |
| Power: | 10 watts max. |
| Voltage: | 100 Vdc max. |
| Isolation: | 30 dB min. |
| VSWR: | 1.50:1 max. |
| Package Type: | SMA |

This is a commercial off the shelf (COTS) product.
For an equivalent product that meets DFARS materials compliance, contact sales.
All specifications are subject to change without notice at any time. Rev: 160108

PULSAR MICROWAVE CORPORATION

www.pulsarmicrowave.com · 48 Industrial St West, Clifton NJ 07012 · Tel: 973-779-6262 · Fax: 973-779-2727 · sales@pulsarmicrowave.com