
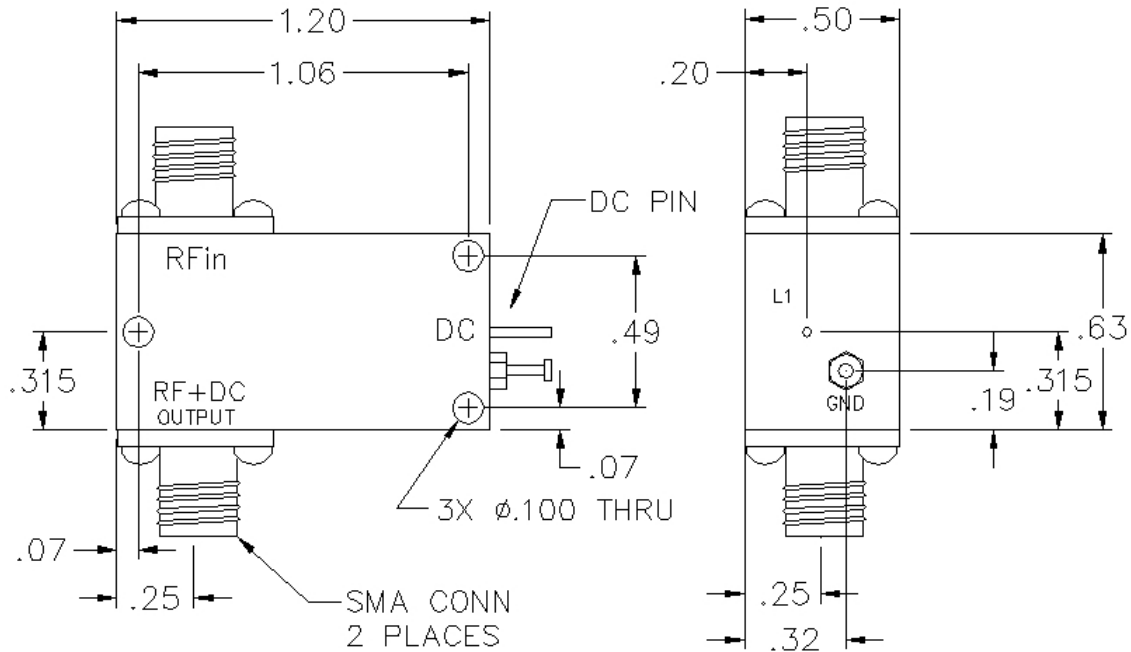


# BT-30-400D

## SMA/PIN BIAS TEE



## SPECIFICATIONS

Name:	BT-30-400D
Frequency Range:	5-12 GHz
Insertion Loss:	0.8 dB max.
Current:	250 mA max.
Power:	1 watts max.
Voltage:	50 Vdc max.
Isolation:	30 dB min.
VSWR:	1.50:1 max.
Package Type:	SMA/Pin

This is a commercial off the shelf (COTS) product.  
For an equivalent product that meets DFARS materials compliance, contact sales.  
All specifications are subject to change without notice at any time. Rev: 200924

