
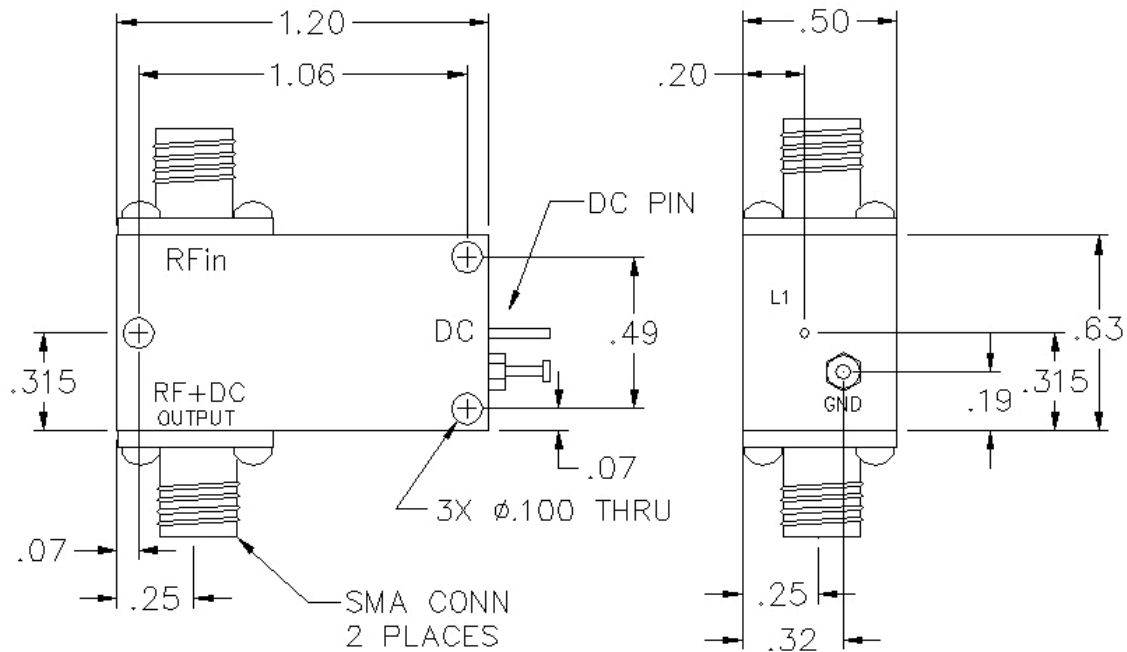


# BT-53-400D

## SMA/PIN BIAS TEE



## SPECIFICATIONS

Name:	BT-53-400D
Frequency Range:	100 kHz-18 GHz
Insertion Loss:	2.0 dB max.
Current:	700 mA max.
Power:	1 watts max.
Voltage:	50 Vdc max.
Isolation:	40 dB min.
VSWR:	1.60:1 max.
Package Type:	SMA/Pin

This is a commercial off the shelf (COTS) product.

For an equivalent product that meets DFARS materials compliance, contact sales.

All specifications are subject to change without notice at any time. Rev: 250512

www.pulsarmicrowave.com · 48 Industrial St West, Clifton NJ 07012 · Tel: 973-779-6262 · Fax: 973-779-2727 · sales@pulsarmicrowave.com

**PULSAR**  
MICROWAVE CORPORATION