
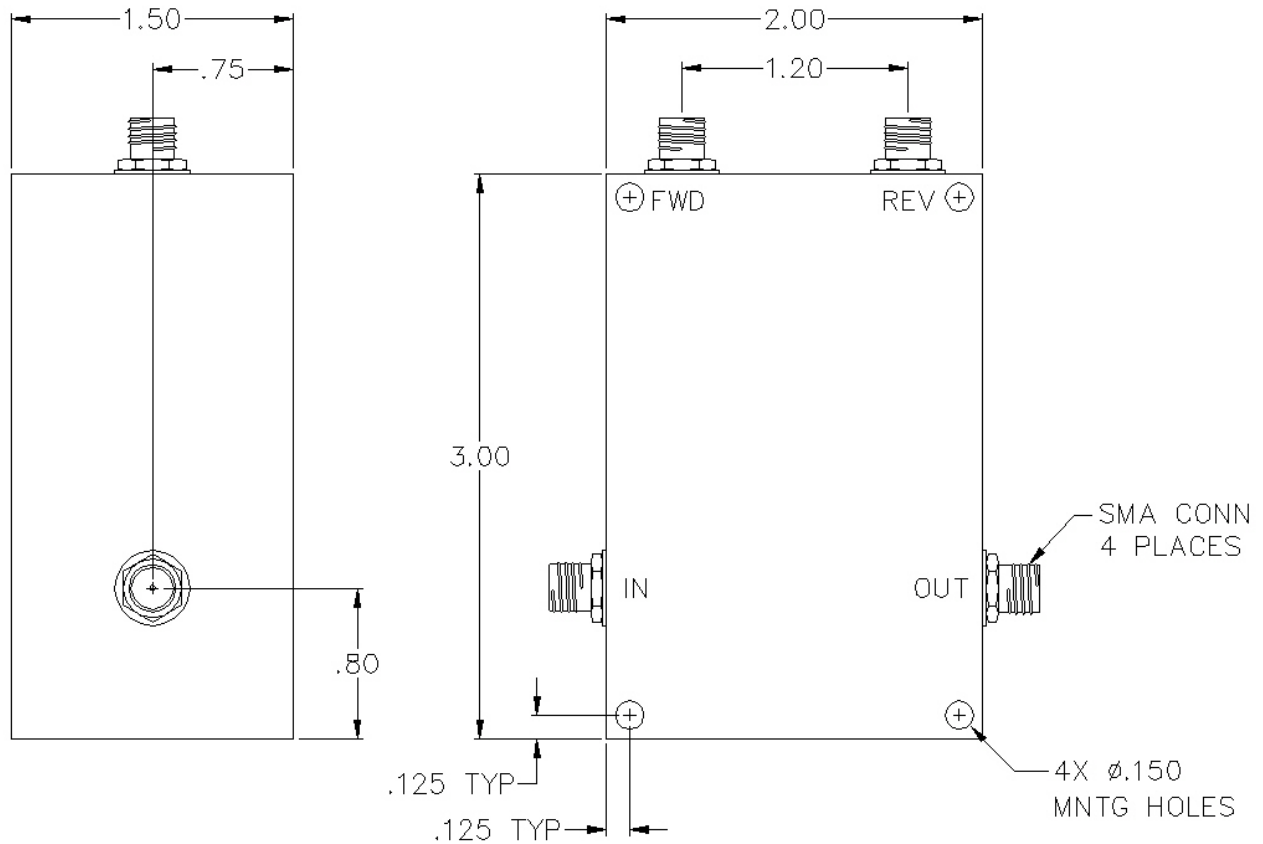


# C30-104-481/2S

## HIGH POWER 30 DB SMA DUAL DIRECTIONAL COUPLER



## SPECIFICATIONS

Name:	C30-104-481/2S
Frequency Range:	2-32 MHz
Coupling:	30.0 $\pm$ 1.00 dB
Coupling Flatness:	$\pm$ 0.25 dB max.
Insertion Loss:	0.10 dB max.
Directivity:	25 dB min.
VSWR In/Out:	1.10:1 max.
Input Power:	100 watts max.
Connector Type:	SMA

Insertion loss does not include coupling loss.  
Input power is specified for load VSWR better than 1.20:1.

This is a commercial off the shelf (COTS) product.  
For an equivalent product that meets DFARS materials compliance, contact sales.  
All specifications are subject to change without notice at any time. Rev: 220628

