


# C30-107-481/3N

## HIGH POWER 30 DB TYPE N DUAL DIRECTIONAL COUPLER

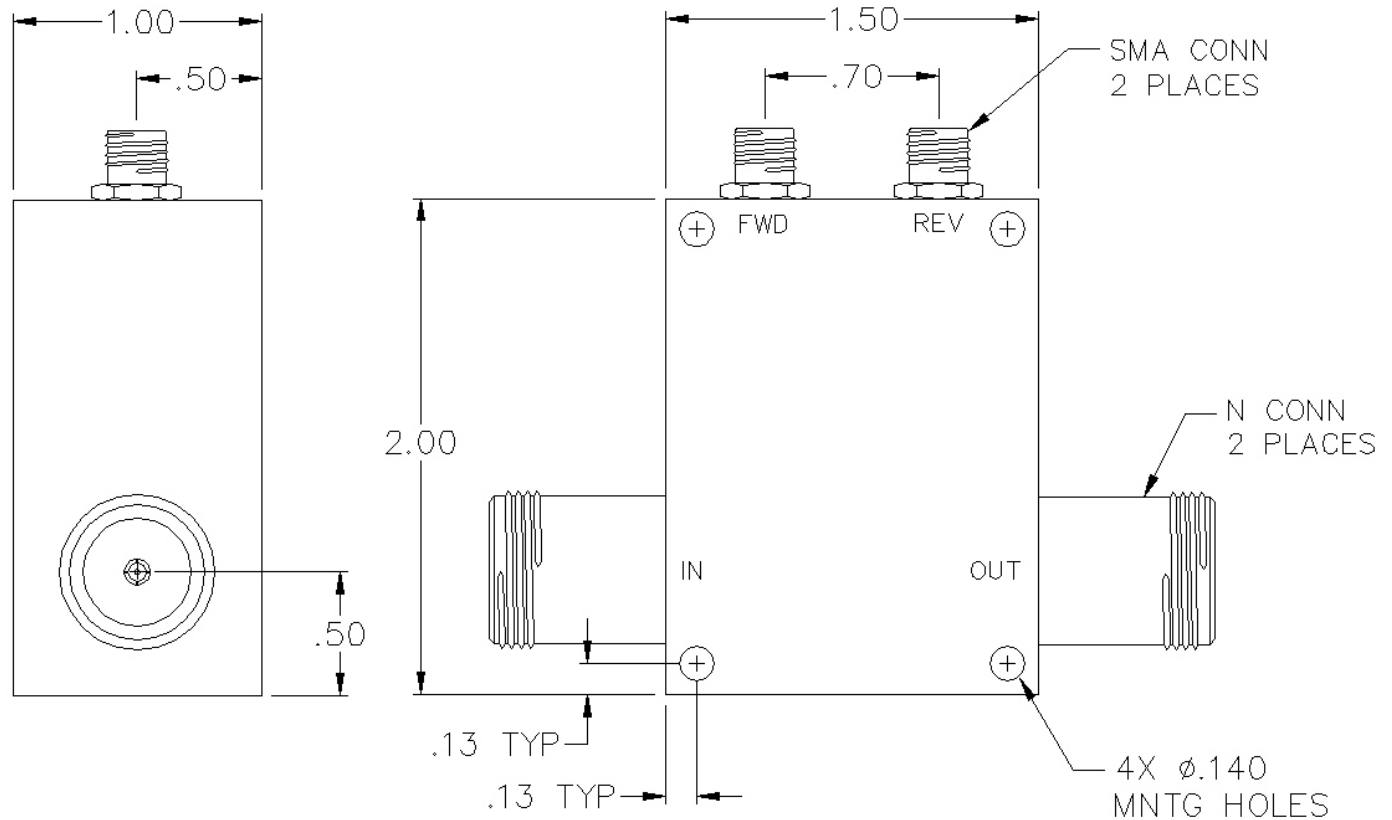

## SPECIFICATIONS

Name:	C30-107-481/3N
Frequency Range:	20-400 MHz
Coupling:	30.0 ± 1.00 dB
Coupling Flatness:	±0.50 dB max.
Insertion Loss:	0.30 dB max.
Directivity:	20 dB min.
VSWR In/Out:	1.15:1 max.
Input Power:	50 watts max.
Connector Type:	N

Insertion loss does not include coupling loss.  
Input power is specified for load VSWR better than 1.20:1.

This is a commercial off the shelf (COTS) product.  
For an equivalent product that meets DFARS materials compliance, contact sales.  
All specifications are subject to change without notice at any time. Rev: 220628

