


C30-107-481/3S

HIGH POWER 30 DB SMA DUAL DIRECTIONAL COUPLER

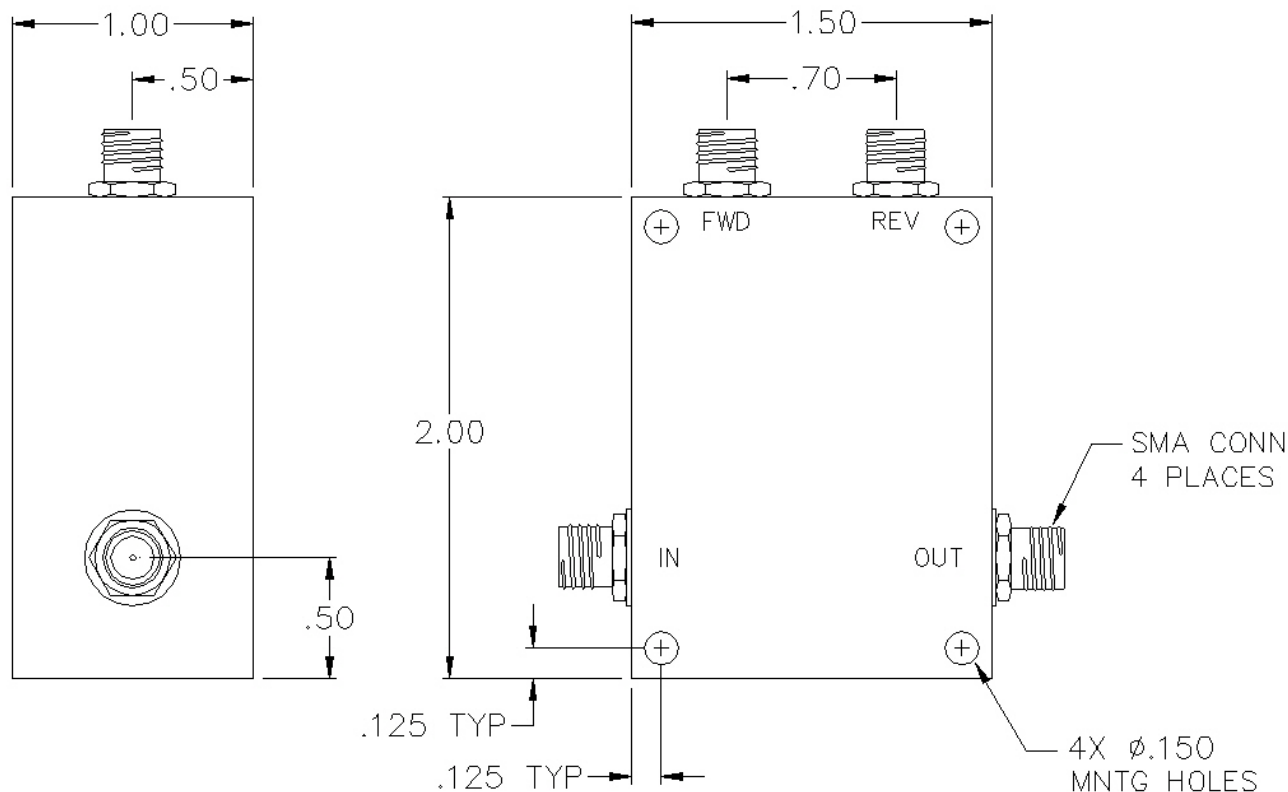

SPECIFICATIONS

Name:	C30-107-481/3S
Frequency Range:	20-400 MHz
Coupling:	30.0 \pm 1.00 dB
Coupling Flatness:	\pm 0.50 dB max.
Insertion Loss:	0.30 dB max.
Directivity:	20 dB min.
VSWR In/Out:	1.15:1 max.
Input Power:	50 watts max.
Connector Type:	SMA

Insertion loss does not include coupling loss.
Input power is specified for load VSWR better than 1.20:1.

This is a commercial off the shelf (COTS) product.
For an equivalent product that meets DFARS materials compliance, contact sales.
All specifications are subject to change without notice at any time. Rev: 220628

