
## C35-29-481/9N

## HIGH POWER 35 DB TYPE N DIRECTIONAL COUPLER



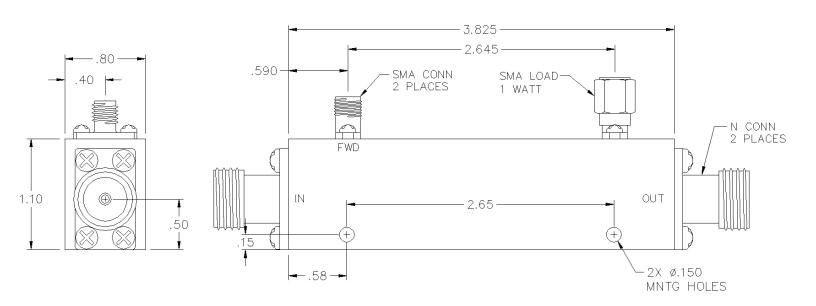

## **SPECIFICATIONS**

Name: C35-29-481/9N Frequency Range: 1500-3000 MHz Coupling:  $35.0 \pm 1.00 dB$ Coupling Flatness: ±1.00 dB max. Insertion Loss: 0.20 dB max. Directivity: 20 dB min. VSWR In/Out: 1.20:1 max. Input Power: 600 watts max.

Connector Type: N

Insertion loss does not include coupling loss.
Input power is specified for load VSWR better than 1.20:1.

This is a commercial off the shelf (COTS) product.

For an equivalent product that meets DFARS materials compliance, contact sales.

All specifications are subject to change without notice at any time. Rev: 250512

