


# C40-27-481/4N

## HIGH POWER 40 DB TYPE N DUAL DIRECTIONAL COUPLER

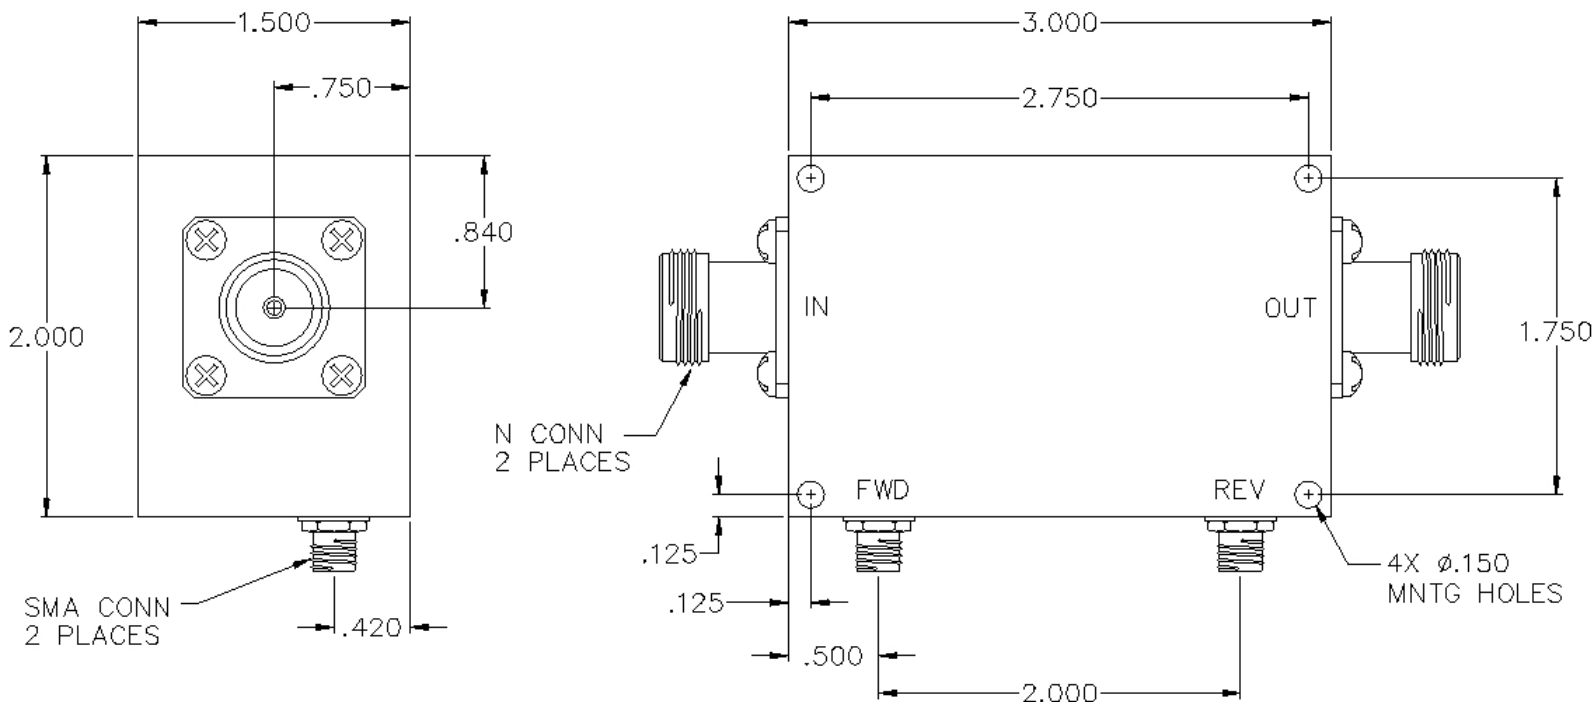

## SPECIFICATIONS

Name:	C40-27-481/4N
Frequency Range:	80-1000 MHz
Coupling:	40.0 $\pm$ 1.00 dB
Coupling Flatness:	$\pm$ 1.00 dB max.
Insertion Loss:	0.30 dB max.
Directivity:	20 dB min.
VSWR In/Out:	1.20:1 max.
Input Power:	1000 watts max.
Connector Type:	N

Insertion loss does not include coupling loss.  
Input power is specified for load VSWR better than 1.20:1.

This is a commercial off the shelf (COTS) product.  
For an equivalent product that meets DFARS materials compliance, contact sales.  
All specifications are subject to change without notice at any time. Rev: 220628

