
## C50-20-481/4N

## HIGH POWER 50 DB TYPE N DUAL DIRECTIONAL COUPLER



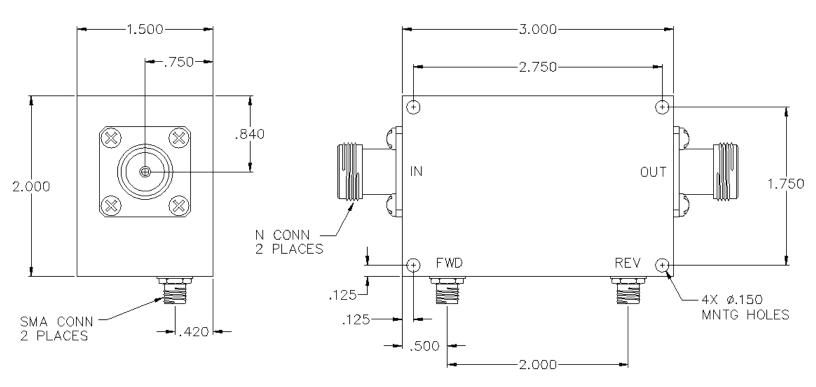

## **SPECIFICATIONS**

Name: Frequency Range:	C50-20-481/4N 100-1000 MHz
Coupling:	50.0 ± 1.00 dB
Coupling Flatness:	±1.00 dB max.
Insertion Loss:	0.40 dB max.
Directivity:	20 dB min.
VSWR In/Out:	1.20:1 max.
Input Power:	500 watts max.
Connector Type:	Ν

Insertion loss does not include coupling loss. Input power is specified for load VSWR better than 1.20:1.

This is a commercial off the shelf (COTS) product. For an equivalent product that meets DFARS materials compliance, contact sales. All specifications are subject to change without notice at any time. Rev: 220628

