


CS10-19-436/19

10 DB SMA DIRECTIONAL COUPLER

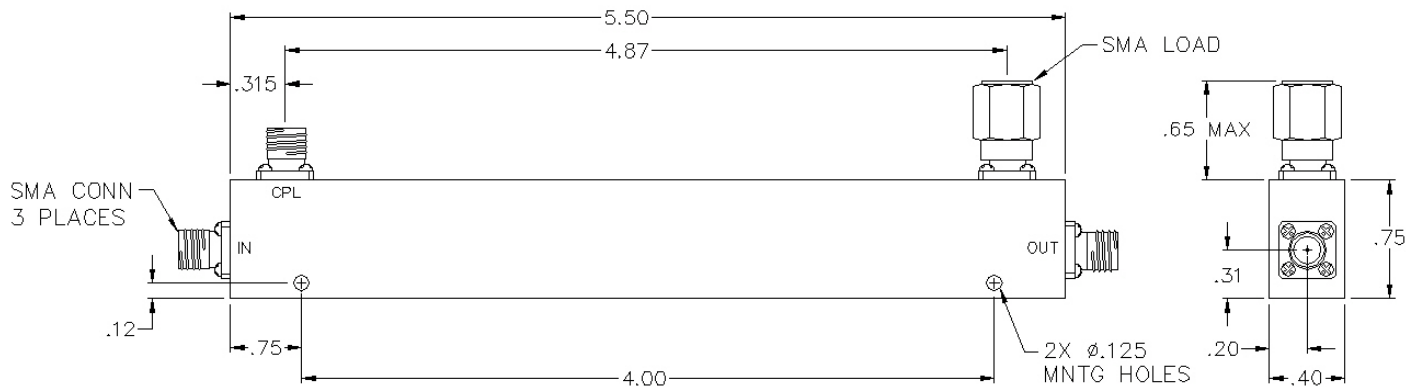

SPECIFICATIONS

Name:	CS10-19-436/19
Frequency Range:	0.5-12 GHz
Coupling:	10.0 \pm 1.00 dB
Coupling Flatness:	\pm 0.80 dB max.
Insertion Loss:	1.00 dB max.
Directivity:	15 dB min.
VSWR:	1.50:1 max.
Input Power:	50 watts max.
Reflected Power:	10 watts max.
Connector Type:	SMA

Insertion loss does not include coupling loss.
Input power is specified for load VSWR better than 1.20:1.

This is a commercial off the shelf (COTS) product.
For an equivalent product that meets DFARS materials compliance, contact sales.
All specifications are subject to change without notice at any time. Rev: 170130

