


CS10-50-435/4

10 DB 2.92MM DIRECTIONAL COUPLER

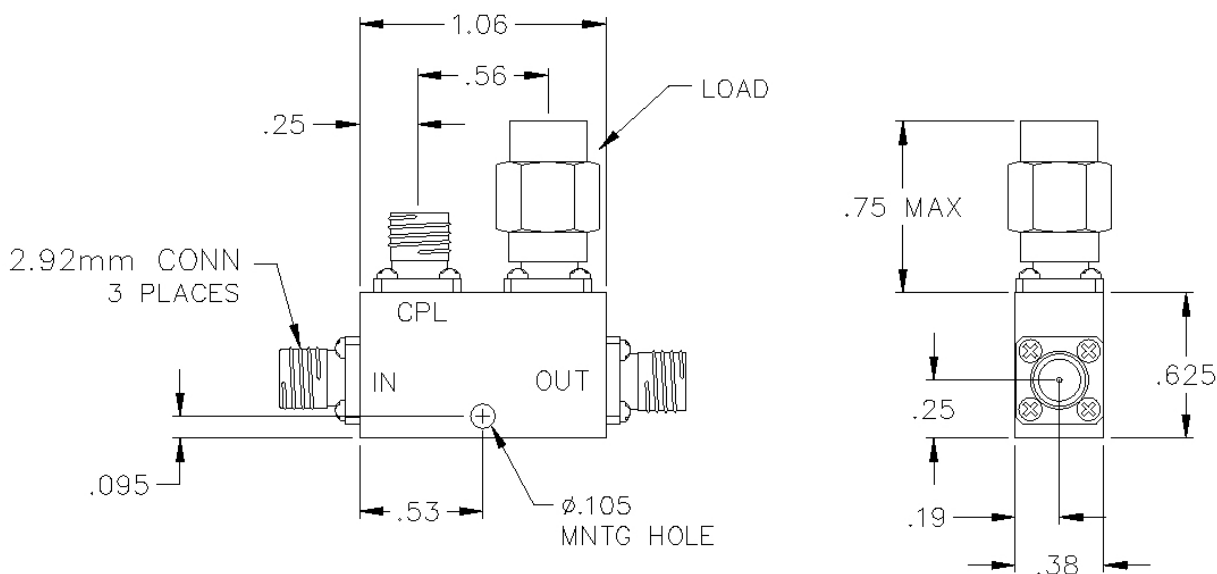

SPECIFICATIONS

Name:	CS10-50-435/4
Frequency Range:	6-26.5 GHz
Coupling:	10.0 $\pm$ 1.00 dB
Coupling Flatness:	$\pm$ 0.70 dB max.
Insertion Loss:	1.00 dB max.
Directivity:	13 dB min.
VSWR:	1.60:1 max.
Input Power:	25 watts max.
Reflected Power:	10 watts max.
Connector Type:	2.92

Insertion loss does not include coupling loss.
Input power is specified for load VSWR better than 1.20:1.

This is a commercial off the shelf (COTS) product.
For an equivalent product that meets DFARS materials compliance, contact sales.
All specifications are subject to change without notice at any time. Rev: 190206

