


# CS20-50-435/4

## 20 DB DIRECTIONAL COUPLER FROM 6 TO 26.5 GHZ - 2.92MM

Image Not Available

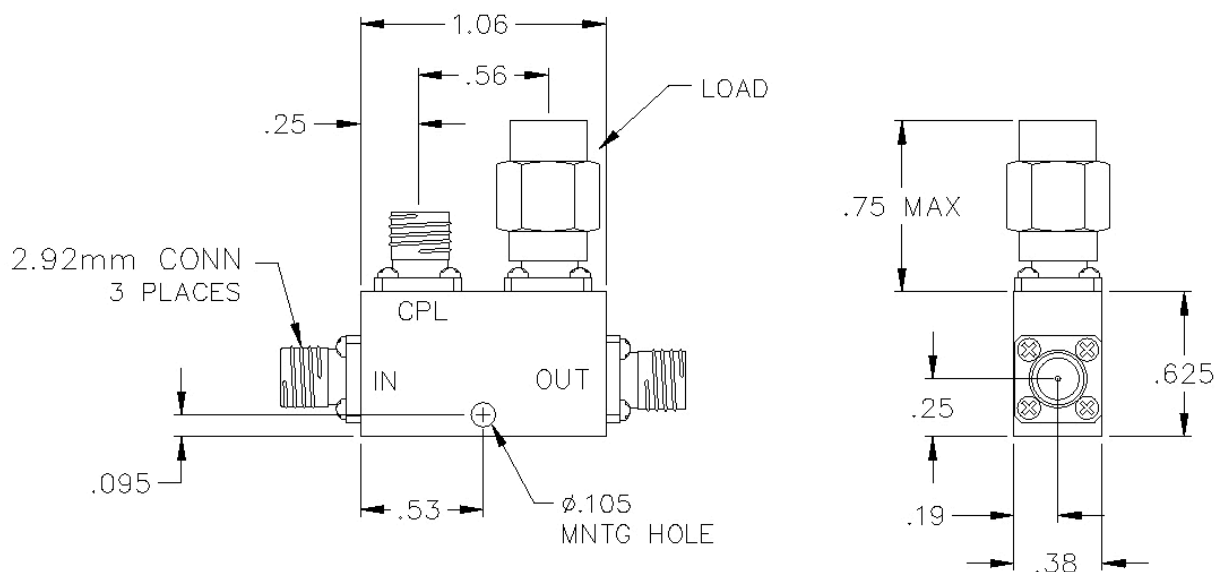

### SPECIFICATIONS

Name:	CS20-50-435/4
Frequency Range:	6-26.5 GHz
Coupling:	20.0 $\pm$ 1.00 dB
Coupling Flatness:	$\pm$ 0.80 dB max.
Insertion Loss:	0.70 dB max.
Directivity:	13 dB min.
VSWR:	1.55:1 max.
Input Power:	20 watts max.
Reflected Power:	20 watts max.
Connector Type:	2.92

Insertion loss does not include coupling loss.  
Input power is specified for load VSWR better than 1.20:1.

This is a commercial off the shelf (COTS) product.  
For an equivalent product that meets DFARS materials compliance, contact sales.  
All specifications are subject to change without notice at any time. Rev: 250614

