


CS20-57-436/20

20 DB 2.92MM DIRECTIONAL COUPLER

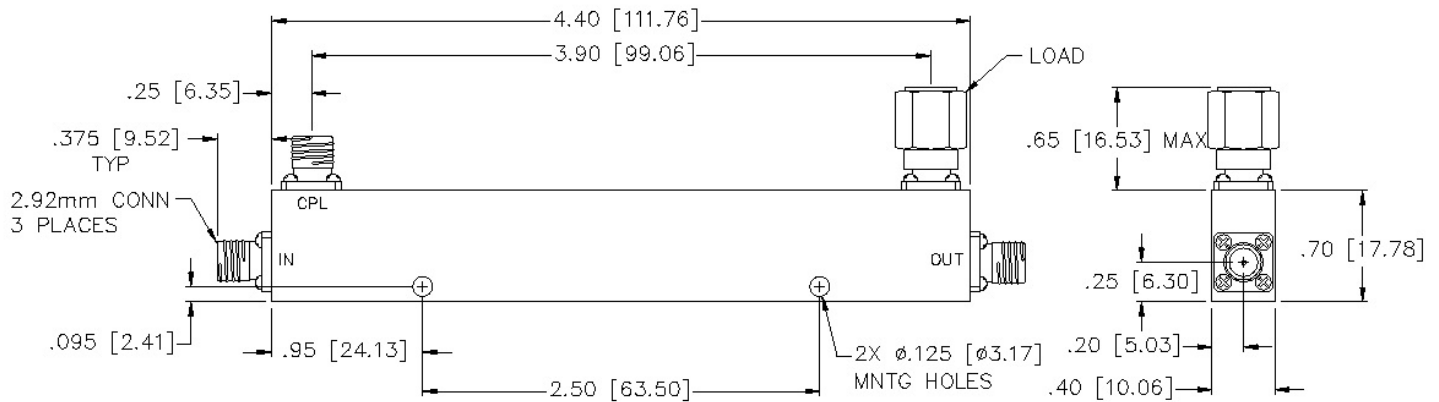

SPECIFICATIONS

Name:	CS20-57-436/20
Frequency Range:	0.5-40 GHz
Coupling:	20.0 ± 1.50 dB
Coupling Flatness:	±1.50 dB max.
Insertion Loss:	2.20 dB max.
Directivity:	12 dB min.
VSWR:	1.60:1 max.
Input Power:	20 watts max.
Reflected Power:	20 watts max.
Connector Type:	2.92

Insertion loss does not include coupling loss.
Input power is specified for load VSWR better than 1.20:1.

This is a commercial off the shelf (COTS) product.
For an equivalent product that meets DFARS materials compliance, contact sales.
All specifications are subject to change without notice at any time. Rev: 201202

