


CS30-51-435/4

30 DB DIRECTIONAL COUPLER FROM 6 TO 40 GHz - 2.92MM

Image Not Available

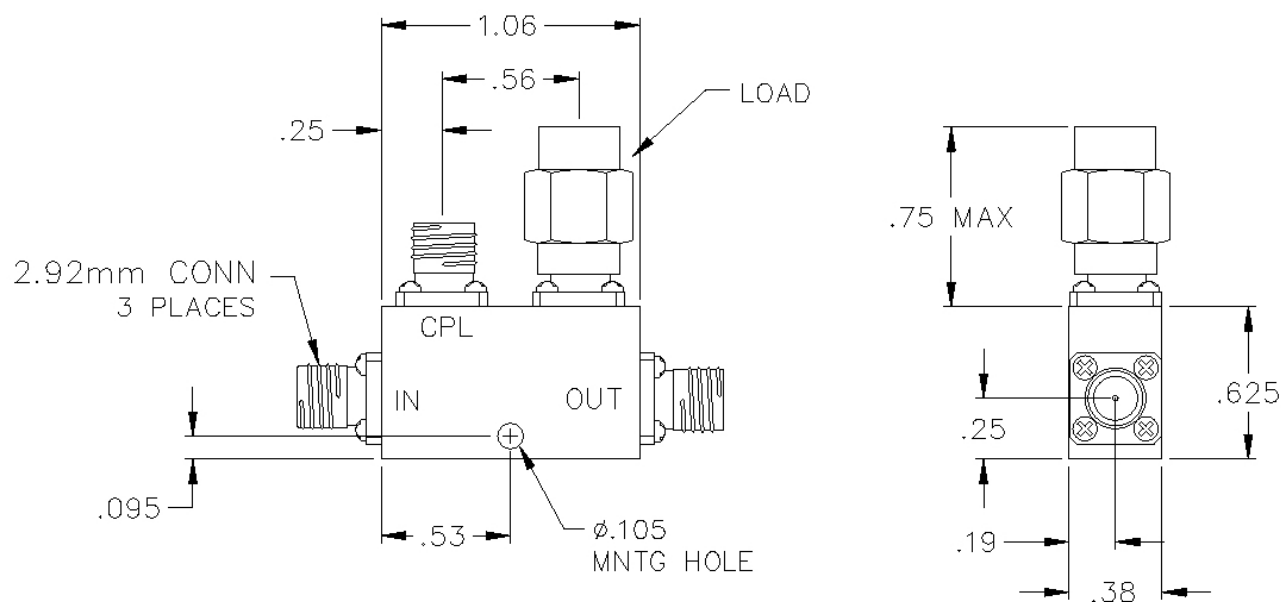

SPECIFICATIONS

Name:	CS30-51-435/4
Frequency Range:	6-40 GHz
Coupling:	30.0 $\pm$ 1.00 dB
Coupling Flatness:	$\pm$ 1.00 dB max.
Insertion Loss:	1.20 dB max.
Directivity:	12 dB min.
VSWR:	1.70:1 max.
Input Power:	25 watts max.
Connector Type:	2.92

Insertion loss does not include coupling loss.

Input power is specified for load VSWR better than 1.20:1.

This is a commercial off the shelf (COTS) product.

For an equivalent product that meets DFARS materials compliance, contact sales.

All specifications are subject to change without notice at any time. Rev: 250614

www.pulsarmicrowave.com · 48 Industrial St West, Clifton NJ 07012 · Tel: 973-779-6262 · Fax: 973-779-2727 · sales@pulsarmicrowave.com

PULSAR
MICROWAVE CORPORATION