


DAT-10-480/1S

DIGITAL STEP ATTENUATOR

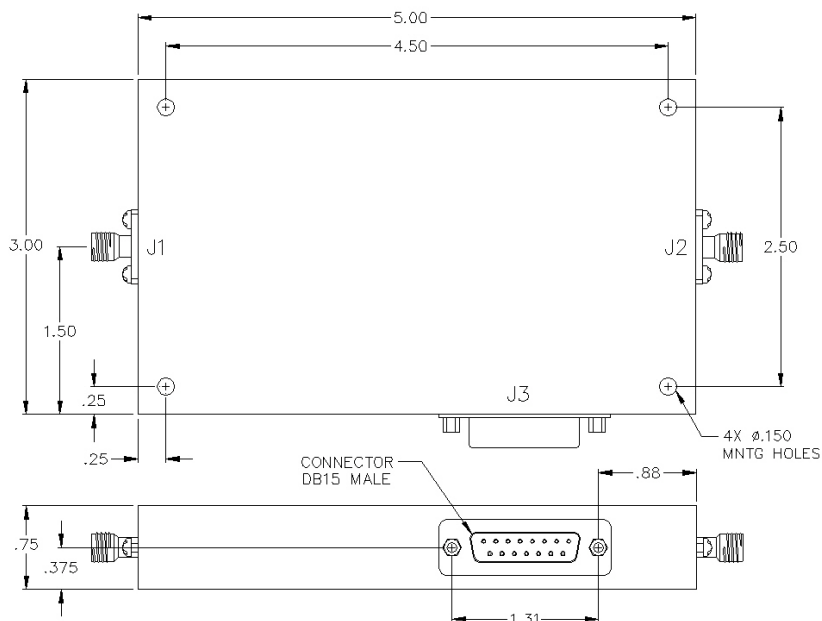

Offset of Mean Attenuation (dB)		Flatness (dB)	
±0.5	0-16	±0.5	0-16
±0.8	17-32	±0.6	17-32
±1.5	32-64	±1.2	32-64

Logic Table

State	Pin 1	Pin 2	Pin 3	Pin 4	Pin 5	Pin 6	Pin 7	Pin 8	Att. 32 dB
-	0	0	0	0	0	0	0	0	0 dB
1	1	0	0	0	0	0	0	0	0.125 dB
2	0	1	0	0	0	0	0	0	0.25 dB
3	0	0	1	0	0	0	0	0	0.50 dB
4	0	0	0	1	0	0	0	0	1.0 dB
5	0	0	0	0	1	0	0	0	2.0 dB
6	0	0	0	0	0	1	0	0	4.0 dB
7	0	0	0	0	0	0	1	0	8.0 dB
8	0	0	0	0	0	0	0	1	16.0 dB

A combination of the above states will provide an attenuation equal to the sum of the selected states.

SPECIFICATIONS

Name: DAT-10-480/1S

Frequency Range: 0.25-0.5 GHz

Attenuation Range: 32 dB

Number of Bits: 8

Insertion Loss: 3.0 dB max.

VSWR: 1.80:1 dB max.

Least Significant Bit: 0.125 LSB

Connector Type: SMA

Operating Power: +20 dBm/100 mw max.

Power Handling: +30 dBm max.

Switching Time: 600 nsec typical.

Control Logic: TTL


Power supply: ±5 Vdc @ ±300 mA, Typical

Operating Temperature: -25°C to +80°C

RF Connectors: SMA Female

Bi-directional: Either SMA connector can be used as input.

Pin-Out



Pin 01 = Bit 1 (LSB)

Pin 02 = Bit 2

Pin 03 = Bit 3

Pin 04 = Bit 4

Pin 05 = Bit 5

Pin 06 = Bit 6

Pin 07 = Bit 7

Pin 08 = Bit 8

Pin 09 = N/C

Pin 10 = N/C

Pin 11 = N/C

Pin 12 = N/C

Pin 13 = +5 Vdc

Pin 14 = -5 Vdc

Pin 15 = Ground

This is a commercial off the shelf (COTS) product.

For an equivalent product that meets DFARS materials compliance, contact sales.

All specifications are subject to change without notice at any time. Rev: 180403

www.pulsarmicrowave.com · 48 Industrial St West, Clifton NJ 07012 · Tel: 973-779-6262 · Fax: 973-779-2727 · sales@pulsarmicrowave.com

PULSAR
MICROWAVE CORPORATION