


DAT-13-480/1S

DIGITAL STEP ATTENUATOR

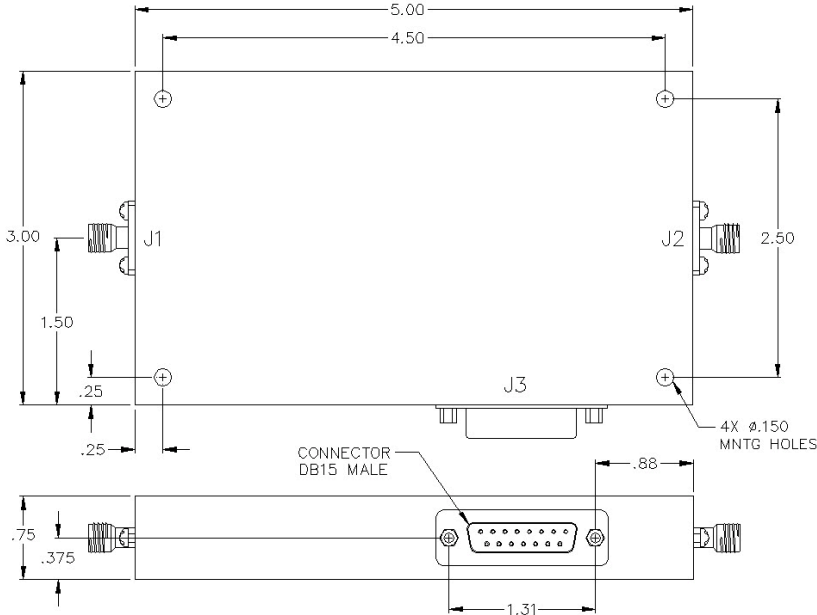

Offset of Mean Attenuation (dB)		Flatness (dB)	
±0.5	0-16	±0.5	0-16
±0.8	17-32	±0.6	17-32
±1.5	32-64	±1.2	32-64

Logic Table


State	Pin 1	Pin 2	Pin 3	Pin 4	Pin 5	Pin 6	Pin 7	Pin 8	Att. 32 dB
-	0	0	0	0	0	0	0	0	0 dB
1	1	0	0	0	0	0	0	0	0.125 dB
2	0	1	0	0	0	0	0	0	0.25 dB
3	0	0	1	0	0	0	0	0	0.50 dB
4	0	0	0	1	0	0	0	0	1.0 dB
5	0	0	0	0	1	0	0	0	2.0 dB
6	0	0	0	0	0	1	0	0	4.0 dB
7	0	0	0	0	0	0	1	0	8.0 dB
8	0	0	0	0	0	0	0	1	16.0 dB

A combination of the above states will provide an attenuation equal to the sum of the selected states.

SPECIFICATIONS

- Name:** DAT-13-480/1S
Frequency Range: 2-4 GHz
Attenuation Range: 32 dB
Number of Bits: 8
Insertion Loss: 4.5 dB max.
VSWR: 1.80:1 dB max.
Least Significant Bit: 0.125 LSB
Connector Type: SMA
Operating Power: +20 dBm/100 mw max.
Power Handling: +30 dBm max.
Switching Time: 600 nsec typical.
Control Logic: TTL
Power supply: ±5 Vdc @ ±300 mA, Typical
Operating Temperature: -25°C to +80°C

Pin-Out



- | | |
|----------------------|-----------------|
| Pin 01 = Bit 1 (LSB) | Pin 09 = N/C |
| Pin 02 = Bit 2 | Pin 10 = N/C |
| Pin 03 = Bit 3 | Pin 11 = N/C |
| Pin 04 = Bit 4 | Pin 12 = N/C |
| Pin 05 = Bit 5 | Pin 13 = +5 Vdc |
| Pin 06 = Bit 6 | Pin 14 = -5 Vdc |
| Pin 07 = Bit 7 | Pin 15 = Ground |
| Pin 08 = Bit 8 | |

RF Connectors: SMA Female
Bi-directional: Either SMA connector can be used as input.

This is a commercial off the shelf (COTS) product.
 For an equivalent product that meets DFARS materials compliance, contact sales.
 All specifications are subject to change without notice at any time. Rev: 250614

