


FX-04-410

SMA PASSIVE FREQUENCY DOUBLER

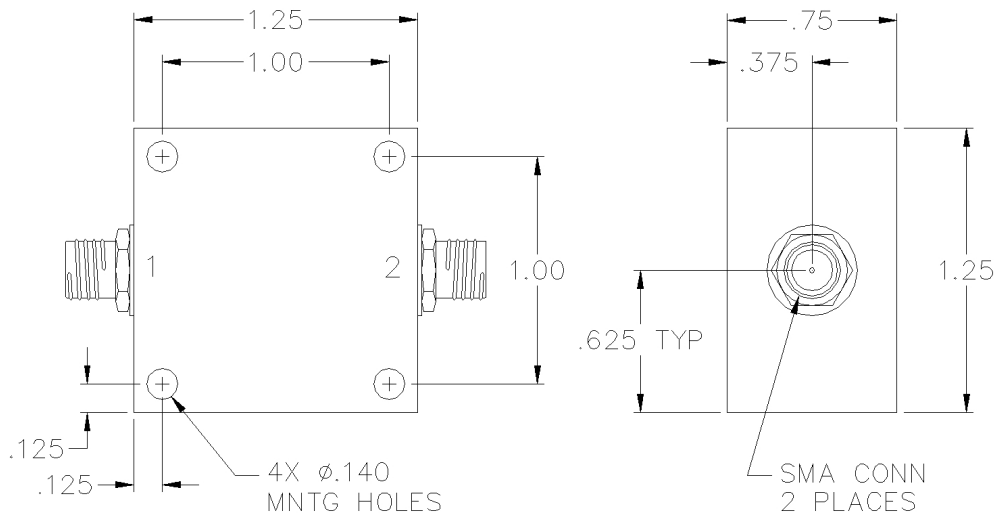

SPECIFICATIONS

| | |
|-----------------------|--------------|
| Name: | FX-04-410 |
| Frequency Range: | |
| Input: | 75-1500 MHz |
| Output: | 150-3000 MHz |
| Input Power Nominal: | +10.0 dBm |
| Conversion Loss @ F2: | 12.0 dB max. |
| Conversion Loss @ F4: | 20.0 dB typ. |
| Spurious: | |
| F1: | 20 dBc |
| F3: | 20 dBc |
| Package Type: | SMA |

PORT CONFIGURATION

| | |
|---------|---------|
| Input: | 1 |
| Output: | 2 |
| Ground: | Housing |

Spurious rejection is with respect to F2.

SMA female connectors standard, also available with BNC, TNC, F, and N connectors.

This is a commercial off the shelf (COTS) product.

For an equivalent product that meets DFARS materials compliance, contact sales.

All specifications are subject to change without notice at any time. Rev: 220628