
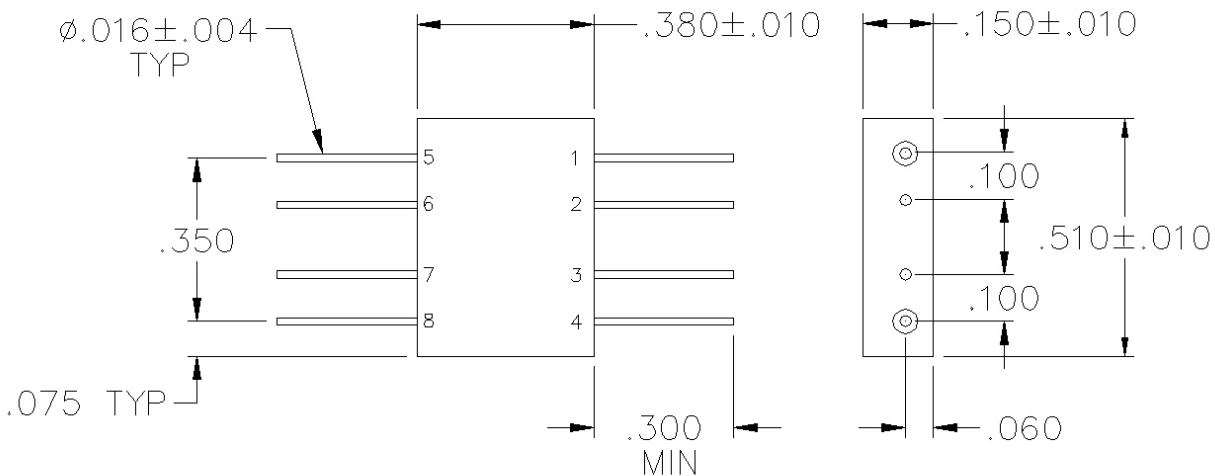


FX-08-301

FLATPACK PASSIVE FREQUENCY QUADRUPLER



SPECIFICATIONS

Name:	FX-08-301
Frequency Range:	
Input:	1400-1600 MHz
Output:	5600-6400 MHz
Input Power Nominal:	+10.0 dBm
Conversion Loss @ F2:	0.0 dB max.
Conversion Loss @ F4:	26.0 dB typ.
Spurious:	
F1:	0 dBc
F3:	0 dBc
Package Type:	Pin

Spurious rejection is with respect to F2.

PORT CONFIGURATION

Input:	1
Output:	8
Ground:	2 - 7

This is a commercial off the shelf (COTS) product.
For an equivalent product that meets DFARS materials compliance, contact sales.
All specifications are subject to change without notice at any time. Rev: 190403

