


# FX-08-A

## SURFACE MOUNT PASSIVE FREQUENCY QUADRUPLER

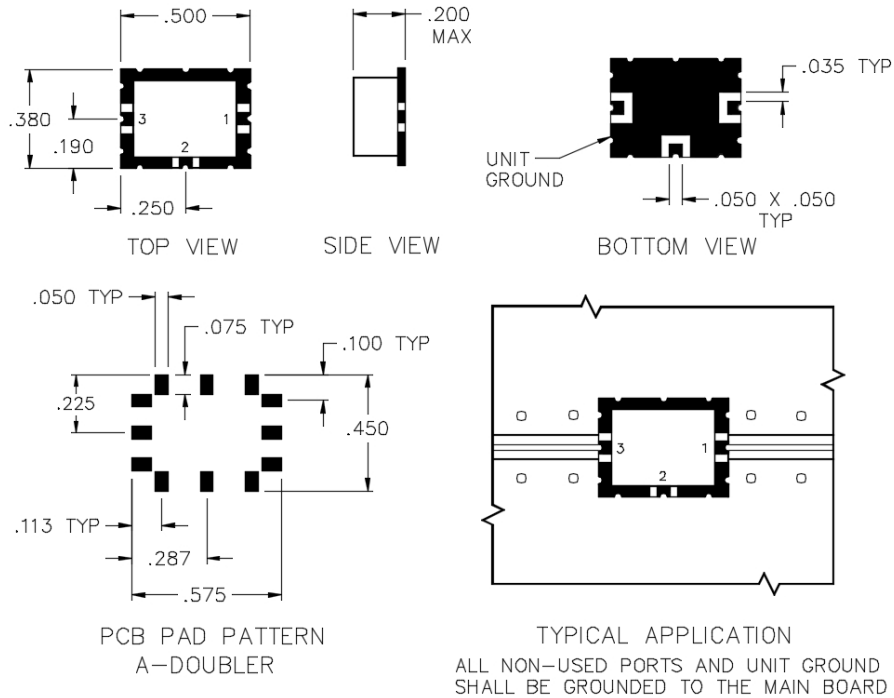

## SPECIFICATIONS

Name:	FX-08-A
Frequency Range:	
Input:	1400-1600 MHz
Output:	5600-6400 MHz
Input Power Nominal:	+10.0 dBm
Conversion Loss @ F2:	0.0 dB max.
Conversion Loss @ F4:	26.0 dB typ.
Spurious:	
F1:	0 dBc
F3:	0 dBc
Package Type:	Surface

Spurious rejection is with respect to F2.

## PORT CONFIGURATION

Input:	1
Output:	3
Ground:	4 Corners

This is a commercial off the shelf (COTS) product.  
For an equivalent product that meets DFARS materials compliance, contact sales.  
All specifications are subject to change without notice at any time. Rev: 160203

