


ID-07-302

QUADRATURE I.F. MIXER (DEMODULATOR) FROM 133 TO 147 MHz - FLATPACK

Image Not Available

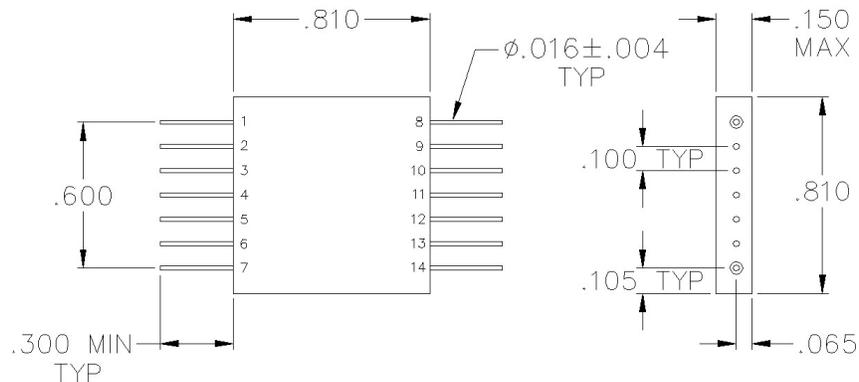

SPECIFICATIONS

| | |
|-------------------------|-----------------|
| Name: | ID-07-302 |
| Carrier (LO) Frequency: | 133-147 MHz |
| RF Frequency: | LO \pm 40 MHz |
| IQ Frequency: | DC-40 MHz |
| Conversion Loss: | 10 dB max. |
| Amplitude Balance: | 0.4 dB max. |
| Phase Balance: | 3° max. |
| Isolation: | |
| L/R: | 35 dB min. |
| L/I: | 30 dB min. |
| VSWR: | 1.5:1 min. |
| Connector Type: | Pin |

PORT CONFIGURATION

| | |
|---------|---------------|
| RF: | 14 |
| LO: | 1 |
| I: | 12 |
| Q: | 5 |
| Ground: | 2-4, 6-11, 13 |

Specifications apply when operating LO power level is $+10 \pm 0.5$ dBm and operating RF power level is -10 ± 0.5 dBm.

IF Frequency (Q) is $+90^\circ$ relative to IF frequency (I) when RF frequency is $>$ LO frequency.

This is a commercial off the shelf (COTS) product.

For an equivalent product that meets DFARS materials compliance, contact sales.

All specifications are subject to change without notice at any time. Rev: 250614

www.pulsarmicrowave.com · 48 Industrial St West, Clifton NJ 07012 · Tel: 973-779-6262 · Fax: 973-779-2727 · sales@pulsarmicrowave.com

PULSAR
MICROWAVE CORPORATION