


QUADRATURE I.F. MIXER (DEMODULATOR) FROM 285 TO 315 MHZ - SMA

Image Not Available

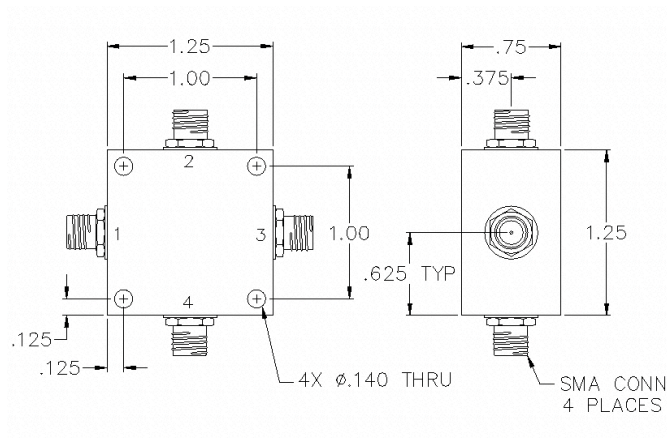

SPECIFICATIONS

Name:	ID-09-412
Carrier (LO) Frequency:	285-315 MHz
RF Frequency:	LO \pm 50 MHz
IQ Frequency:	DC-50 MHz
Conversion Loss:	11 dB max.
Amplitude Balance:	0.4 dB max.
Phase Balance:	4° max.
Isolation:	
L/R:	35 dB min.
L/I:	30 dB min.
VSWR:	1.8:1 min.
Connector Type:	SMA

PORT CONFIGURATION

RF:	3
LO:	1
I:	2
Q:	4
Ground:	Housing

Specifications apply when operating LO power level is $+10 \pm 0.5$ dBm and operating RF power level is -10 ± 0.5 dBm.

IF Frequency (Q) is $+90^\circ$ relative to IF frequency (I) when RF frequency is $>$ LO frequency.
SMA female connectors standard, also available with BNC, TNC, F, and N connectors.

This is a commercial off the shelf (COTS) product.

For an equivalent product that meets DFARS materials compliance, contact sales.

All specifications are subject to change without notice at any time. Rev: 250614