


ID-16-E

QUADRATURE I.F. MIXER (DEMODULATOR)

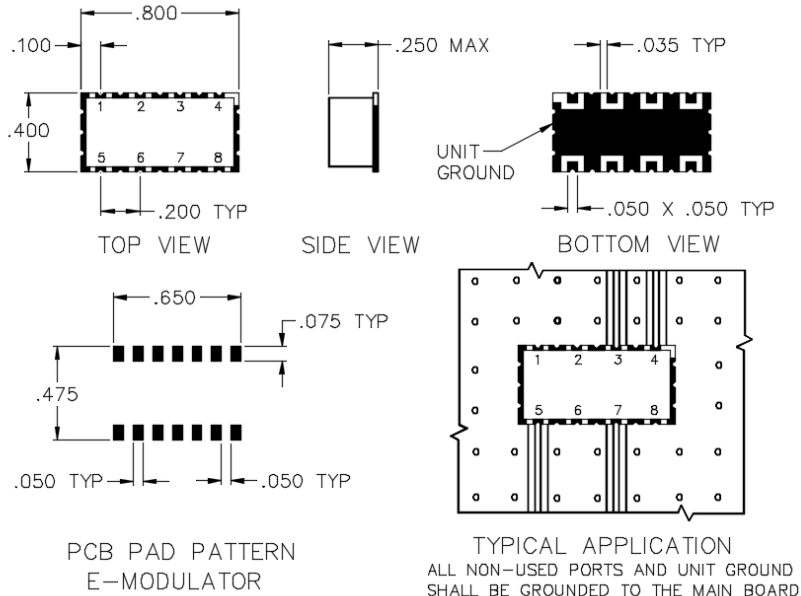

SPECIFICATIONS

Name:	ID-16-E
Carrier (LO) Frequency:	1805-1880 MHz
RF Frequency:	LO \pm 50 MHz
IQ Frequency:	DC-50 MHz
Conversion Loss:	12 dB max.
Amplitude Balance:	1.0 dB max.
Phase Balance:	7° max.
Isolation:	
L/R:	30 dB min.
L/I:	25 dB min.
VSWR:	1.8:1 min.
Connector Type:	Surface

PORT CONFIGURATION

RF:	4
LO:	5
I:	3
Q:	7
Ground:	1, 2, 6, 8

Specifications apply when operating LO power level is $+10 \pm 0.5$ dBm and operating RF power level is -10 ± 0.5 dBm.
IF Frequency (Q) is $+90^\circ$ relative to IF frequency (I) when RF frequency is $>$ LO frequency.

This is a commercial off the shelf (COTS) product.
For an equivalent product that meets DFARS materials compliance, contact sales.
All specifications are subject to change without notice at any time. Rev: 160203