


IM-11-302

SINGLE SIDEBAND IQ MODULATOR

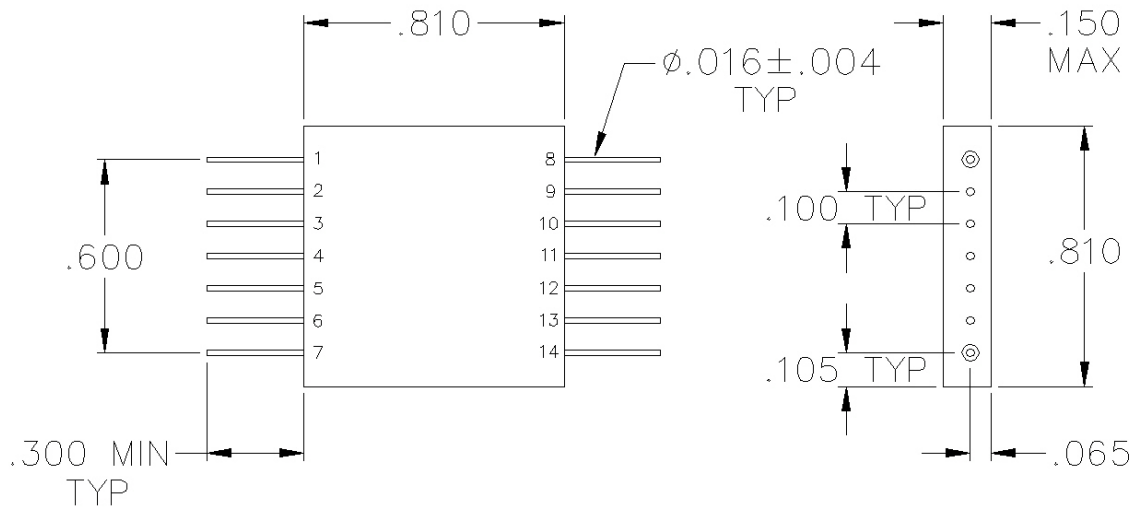

SPECIFICATIONS

Name:	IM-11-302
Carrier Frequency (+10 dBm):	810-830 MHz
Modulation Frequency (-10 dBm):	DC-100 MHz
Carrier Power:	+10 dBm nom.
Conversion Loss:	9.0 dB max.
Compression Point:	0 dBm min.
Sideband Rejection:	30 dBc min.
Carrier Rejection:	30 dBc min.
Connector Type:	Pin

PORT CONFIGURATION

Carrier:	1
Mod. I:	12
Mod. Q:	5
RF Out:	14
Ground:	2-4, 6-11, 13

Single Sideband Modulators do not include baseband quadrature hybrids.

Lower Sideband is suppressed when modulation frequency Q is +90° relative to modulation frequency I.

This is a commercial off the shelf (COTS) product.

For an equivalent product that meets DFARS materials compliance, contact sales.

All specifications are subject to change without notice at any time. Rev: 190403

www.pulsarmicrowave.com · 48 Industrial St West, Clifton NJ 07012 · Tel: 973-779-6262 · Fax: 973-779-2727 · sales@pulsarmicrowave.com

