


IM-15-E

SINGLE SIDEBAND IQ MODULATOR

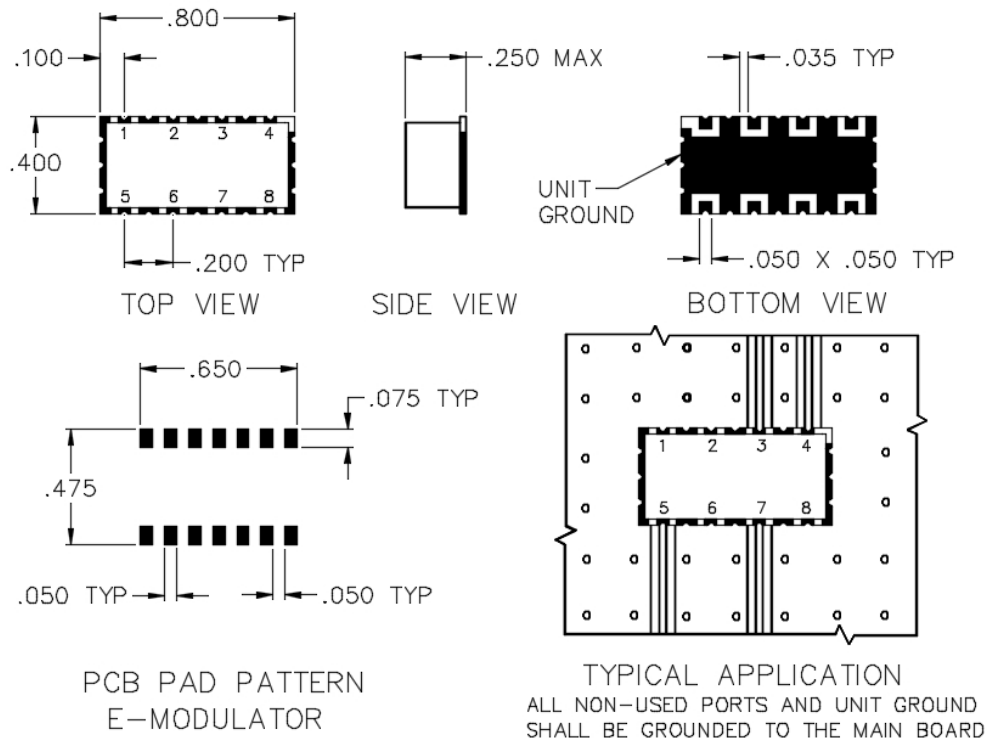

SPECIFICATIONS

Name:	IM-15-E
Carrier Frequency (+10 dBm):	1710-1735 MHz
Modulation Frequency (-10 dBm):	DC-100 MHz
Carrier Power:	+10 dBm nom.
Conversion Loss:	10.0 dB max.
Compression Point:	0 dBm min.
Sideband Rejection:	20 dBc min.
Carrier Rejection:	20 dBc min.
Connector Type:	Surface

PORT CONFIGURATION

Carrier:	5
Mod. I:	3
Mod. Q:	7
RF Out:	4
Ground:	1, 2, 6, 8

Single Sideband Modulators do not include baseband quadrature hybrids.
Lower Sideband is suppressed when modulation frequency Q is +90° relative to modulation frequency I.

This is a commercial off the shelf (COTS) product.
For an equivalent product that meets DFARS materials compliance, contact sales.
All specifications are subject to change without notice at any time. Rev: 160203

www.pulsarmicrowave.com · 48 Industrial St West, Clifton NJ 07012 · Tel: 973-779-6262 · Fax: 973-779-2727 · sales@pulsarmicrowave.com

