


JT-06-A

3 PORT 3 DB SURFACE MOUNT 180° HYBRID COUPLER

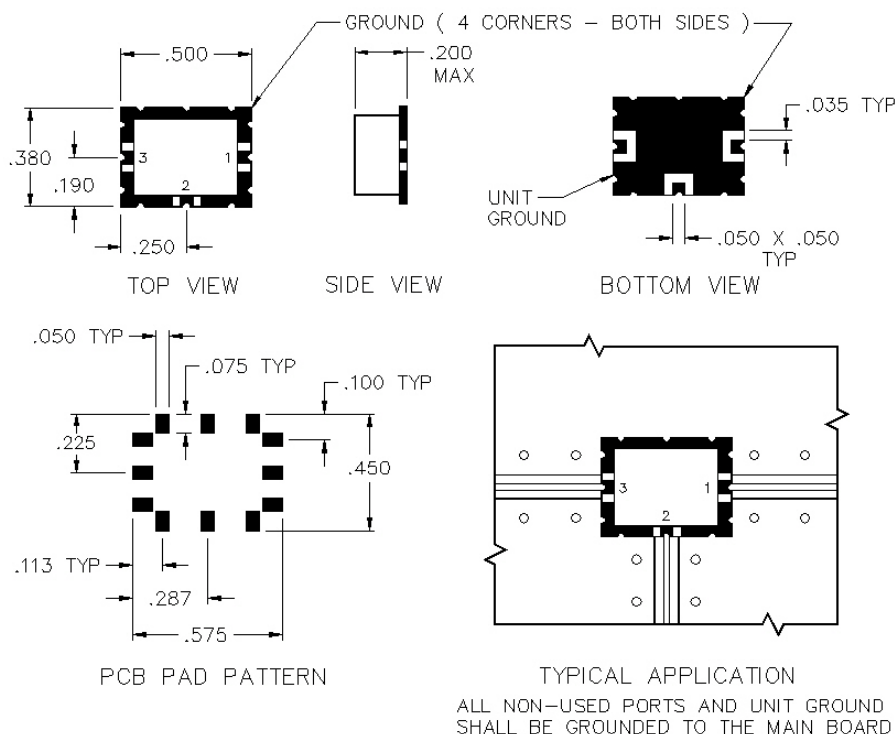

SPECIFICATIONS

Name:	JT-06-A
Frequency Range:	20-1000 MHz
Insertion Loss:	1.5 dB max.
Isolation A-B:	17 dB min.
Input Power:	1 watts max.
Amplitude Balance:	0.5 dB max.
Phase Balance:	7° max.
VSWR:	2.00:1 max.
Package Type:	Surface

PORT CONFIGURATION

Delta:	2
A (0°):	1
B (180°):	3
Ground:	4 Corners

Amplitude balance is defined by input Sum or Delta to output A & B.

This is a commercial off the shelf (COTS) product.
For an equivalent product that meets DFARS materials compliance, contact sales.
All specifications are subject to change without notice at any time. Rev: 190326

