
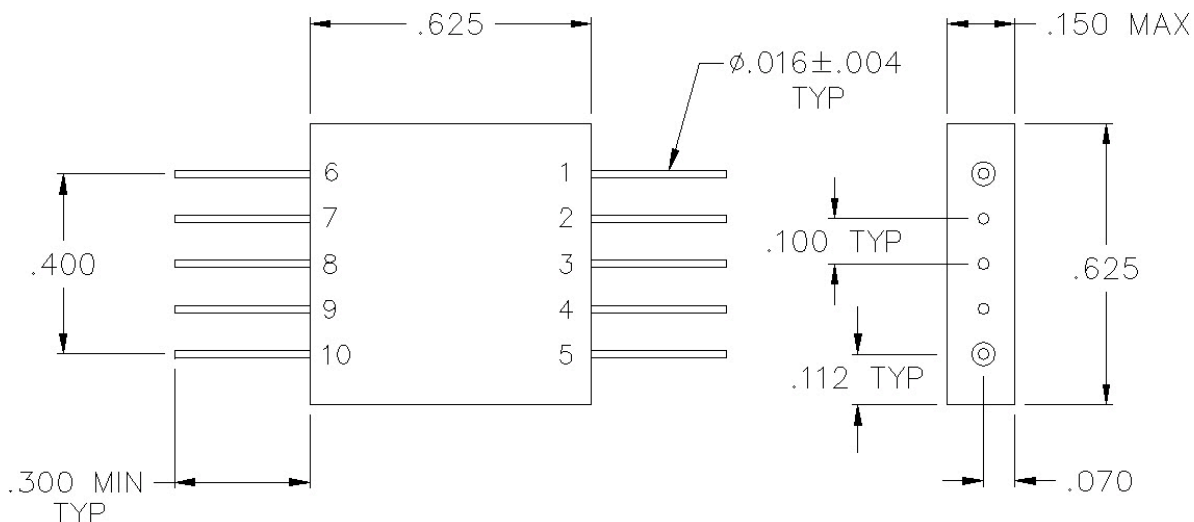


JT-07-304

3 PORT 3 DB FLATPACK 180° HYBRID COUPLER



SPECIFICATIONS

Name:	JT-07-304
Frequency Range:	40-850 MHz
Insertion Loss:	1.5 dB max.
Isolation A-B:	20 dB min.
Input Power:	1 watts max.
Amplitude Balance:	0.5 dB max.
Phase Balance:	4° max.
VSWR:	1.50:1 max.
Package Type:	Pin

PORT CONFIGURATION

Delta:	5
A (0°):	10
B (180°):	6
Ground:	1-4, 7-9

Amplitude balance is defined by input Sum or Delta to output A & B.

This is a commercial off the shelf (COTS) product.

For an equivalent product that meets DFARS materials compliance, contact sales.

All specifications are subject to change without notice at any time. Rev: 250430

www.pulsarmicrowave.com · 48 Industrial St West, Clifton NJ 07012 · Tel: 973-779-6262 · Fax: 973-779-2727 · sales@pulsarmicrowave.com

