


JTP-10-450/1N

3 PORT 3 DB TYPE N 180° HYBRID COUPLER

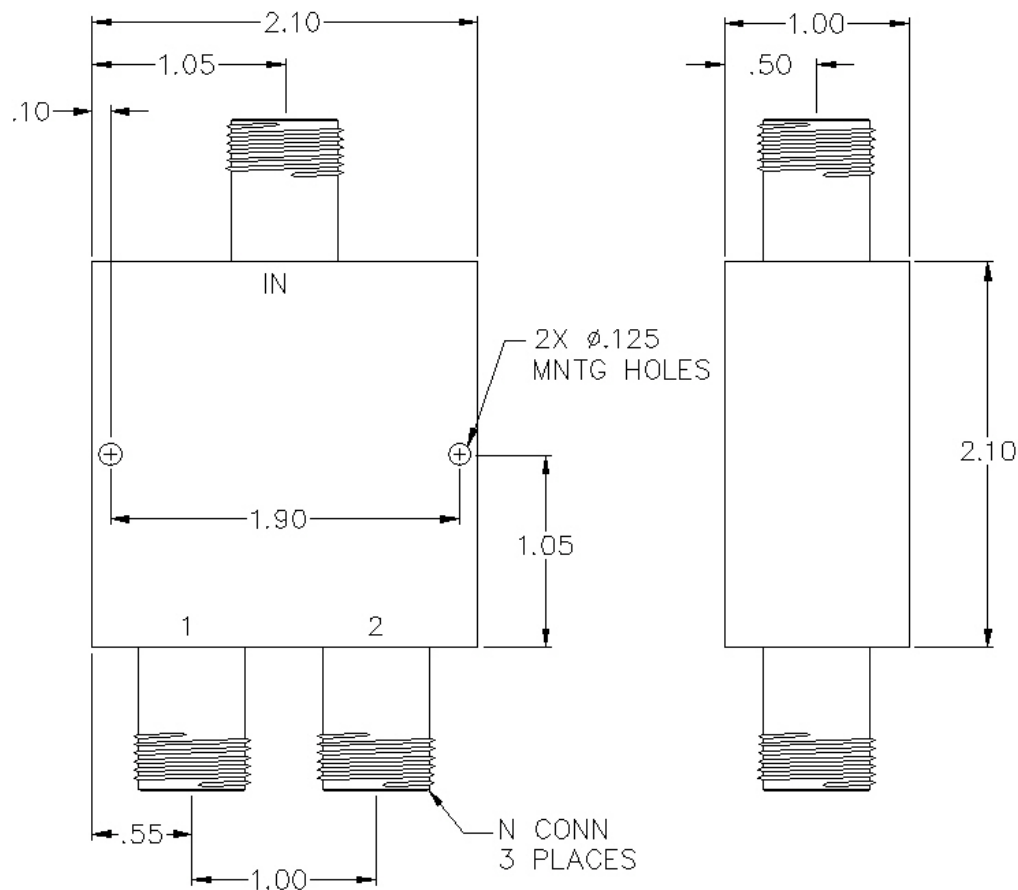

SPECIFICATIONS

Name:	JTP-10-450/1N
Frequency Range:	10-100 MHz
Insertion Loss:	0.6 dB max.
Isolation A-B:	20 dB min.
Input Power:	50 watts max.
Amplitude Balance:	0.5 dB max.
Phase Balance:	3° max.
VSWR:	1.40:1 max.
Package Type:	N

Amplitude balance is defined by input Sum or Delta to output A & B.

This is a commercial off the shelf (COTS) product.

For an equivalent product that meets DFARS materials compliance, contact sales.

All specifications are subject to change without notice at any time. Rev: 220628

www.pulsarmicrowave.com · 48 Industrial St West, Clifton NJ 07012 · Tel: 973-779-6262 · Fax: 973-779-2727 · sales@pulsarmicrowave.com

PULSAR
MICROWAVE CORPORATION