MM-06-S

HIGH FREQUENCY RF MIXER

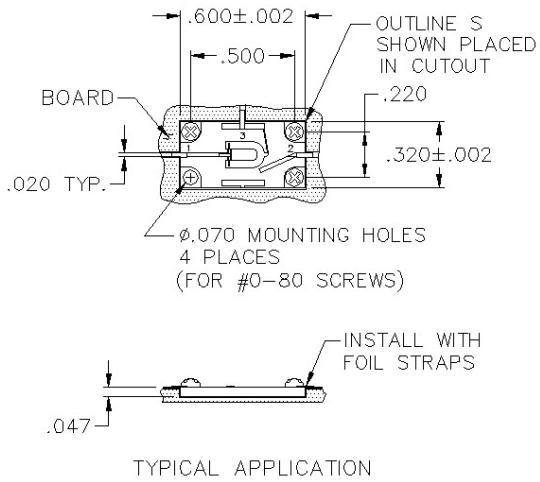

TYPICAL APPLICATION

SPECIFICATIONS

Name:	MM-06-S
Frequency Range:	
LO/RF:	5-7 GHz
IF:	DC-1.0 GHz
LO Drive:	+10 dBm
Conversion Loss:	
	5.0 dB typ.
	6.0 dB max.
1 dB Compression Point:	+4 dBm typ.
L/R Isolation:	
	45 dB typ.
	40 dB min.
L/I Isolation:	
	35 dB typ.
	30 dB min.
Package Type:	Drop-In

PORT CONFIGURATION

RF:	2
LO:	1
IF:	3

This is a commercial off the shelf (COTS) product.
For an equivalent product that meets DFARS materials compliance, contact sales.
All specifications are subject to change without notice at any time. Rev: 250614

PULSAR MICROWAVE CORPORATION

www.pulsarmicrowave.com · 48 Industrial St West, Clifton NJ 07012 · Tel: 973-779-6262 · Fax: 973-779-2727 · sales@pulsarmicrowave.com