


MT-02-302

QUADRAPHASE MODULATOR

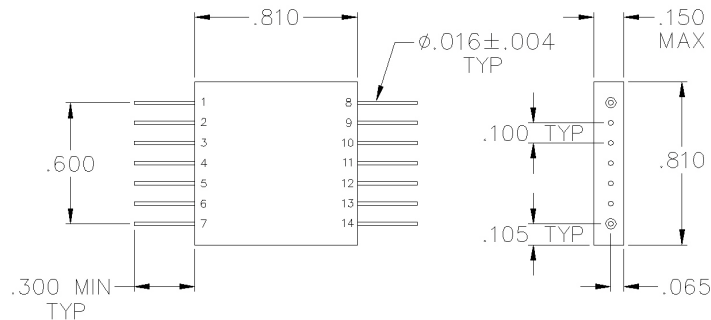

SPECIFICATIONS

Name:	MT-02-302
Frequency Range:	20.3-22.4 MHz
Insertion Loss:	7.0 dB max.
1 dB Compression Point:	+4 dBm min.
Amplitude Balance:	0.4 dB max.
Phase Balance:	2° max.
VSWR:	1.50:1 max.
Package Type:	Pin

Specifications are for a drive current of ± 20 mA.
Maximum RF input power is +10 dBm.
TTL Control option available, contact sales.

PORT CONFIGURATION

Input:	1
Output:	14
D1:	5
D2:	12
Ground:	2-4, 6-11, 13

TRUTH TABLE

Phase	D1 (mA)	D2 (mA)
0°	+20	+20
90°	+20	-20
180°	-20	-20
270°	-20	+20

This is a commercial off the shelf (COTS) product.
For an equivalent product that meets DFARS materials compliance, contact sales.
All specifications are subject to change without notice at any time. Rev: 190403

