


# P16-05-456/1S

## 16-WAY SMA POWER DIVIDER

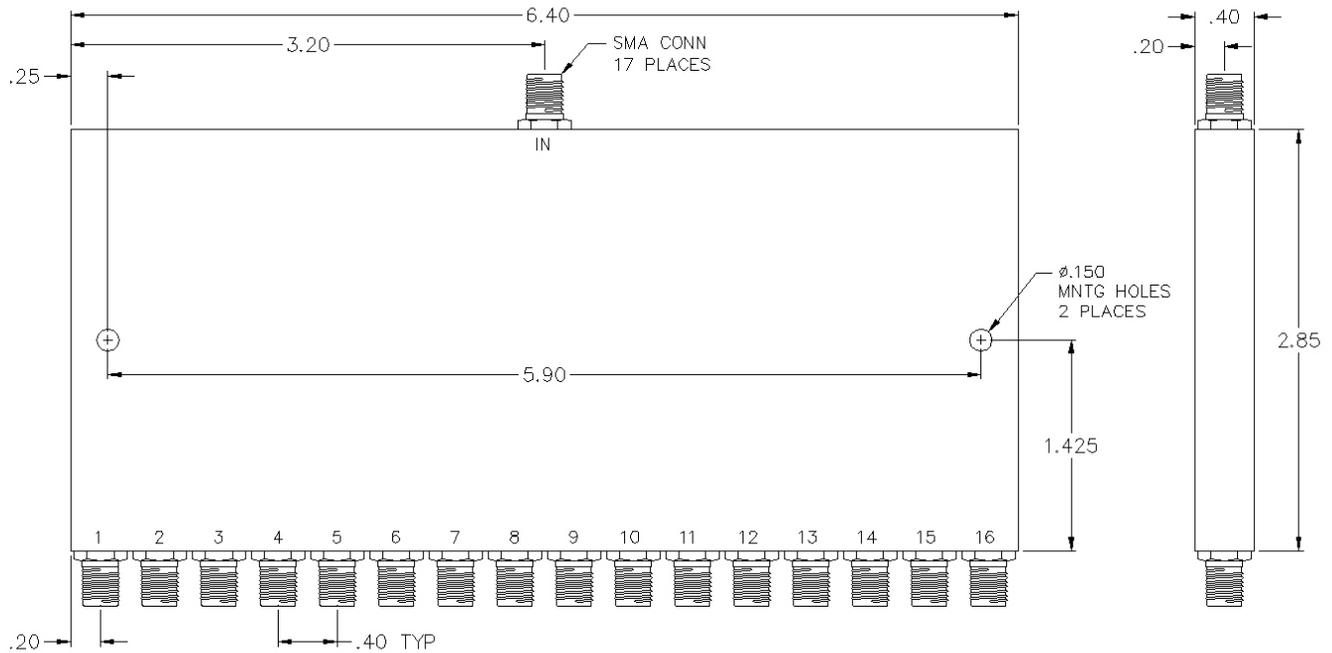

## SPECIFICATIONS

Name:	P16-05-456/1S
Frequency Range:	20-1600 MHz
Insertion Loss:	5.0 dB max.
Isolation:	18 dB min.
Amplitude Balance:	0.6 dB max.
Phase Balance:	10° max.
VSWR:	1.60:1 max.
Input Power:	1 watts max.
Package Type:	SMA

Input power is specified for load VSWR better than 1.20:1.

This is a commercial off the shelf (COTS) product.  
For an equivalent product that meets DFARS materials compliance, contact sales.  
All specifications are subject to change without notice at any time. Rev: 190326

