


P2-04-DD

2-WAY SURFACE MOUNT POWER DIVIDER

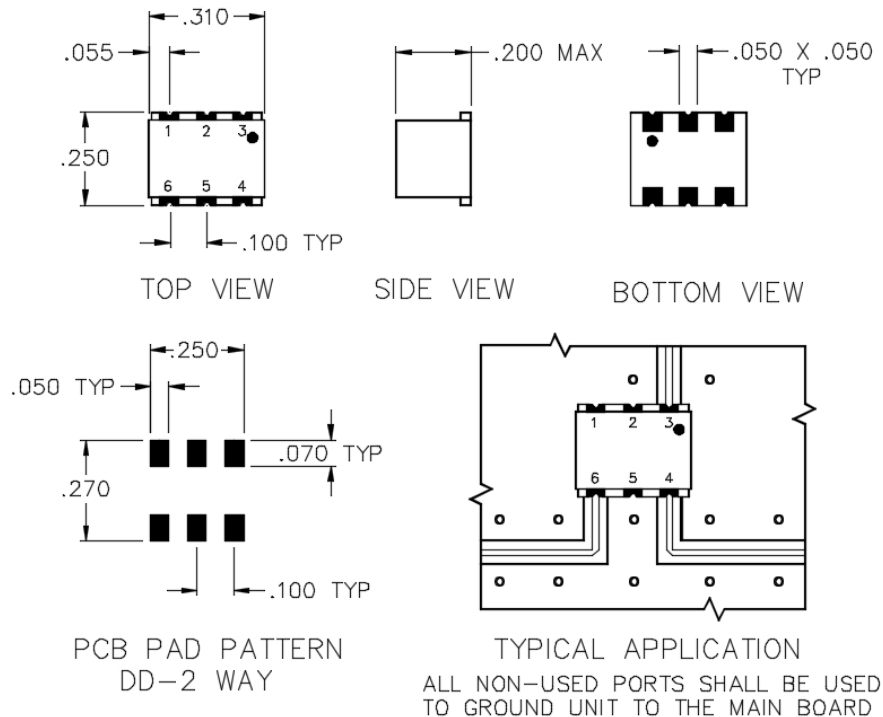

SPECIFICATIONS

Name:	P2-04-DD
Frequency Range:	0.5-300 MHz
Insertion Loss:	0.7 dB max.
Isolation:	20 dB min.
Amplitude Balance:	0.3 dB max.
Phase Balance:	2° max.
VSWR:	1.30:1 max.
Input Power:	1 watts max.
Package Type:	Surface

Input power is specified for load VSWR better than 1.20:1.
75 Ohm and higher power models available, contact sales.

PORT CONFIGURATION

Input:	6
Output:	4, 3
Ground:	1, 2, 5

This is a commercial off the shelf (COTS) product.
For an equivalent product that meets DFARS materials compliance, contact sales.
All specifications are subject to change without notice at any time. Rev: 190326