


# P2-06-411

## 2-WAY SMA POWER DIVIDER

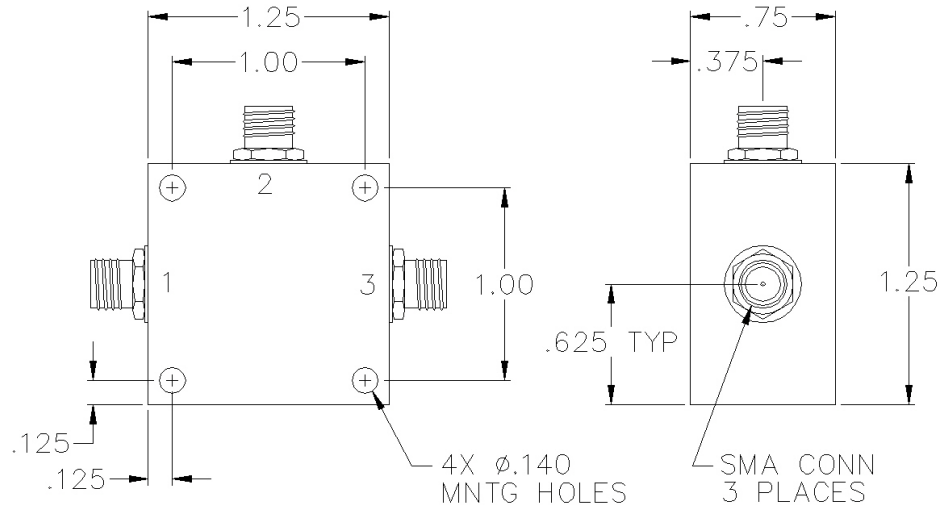

### SPECIFICATIONS

|                    |              |
|--------------------|--------------|
| Name:              | P2-06-411    |
| Frequency Range:   | 1-500 MHz    |
| Insertion Loss:    | 0.8 dB max.  |
| Isolation:         | 25 dB min.   |
| Amplitude Balance: | 0.3 dB max.  |
| Phase Balance:     | 2° max.      |
| VSWR:              | 1.30:1 max.  |
| Input Power:       | 1 watts max. |
| Package Type:      | SMA          |

### PORT CONFIGURATION

|         |      |
|---------|------|
| Input:  | 2    |
| Output: | 1, 3 |

Input power is specified for load VSWR better than 1.20:1.  
SMA female connectors standard, also available with BNC, TNC, F, and N connectors.  
75 Ohm and higher power models available, contact sales.

This is a commercial off the shelf (COTS) product.  
For an equivalent product that meets DFARS materials compliance, contact sales.  
All specifications are subject to change without notice at any time. Rev: 220628

