


# P2-12-DD

## 2-WAY SURFACE MOUNT POWER DIVIDER

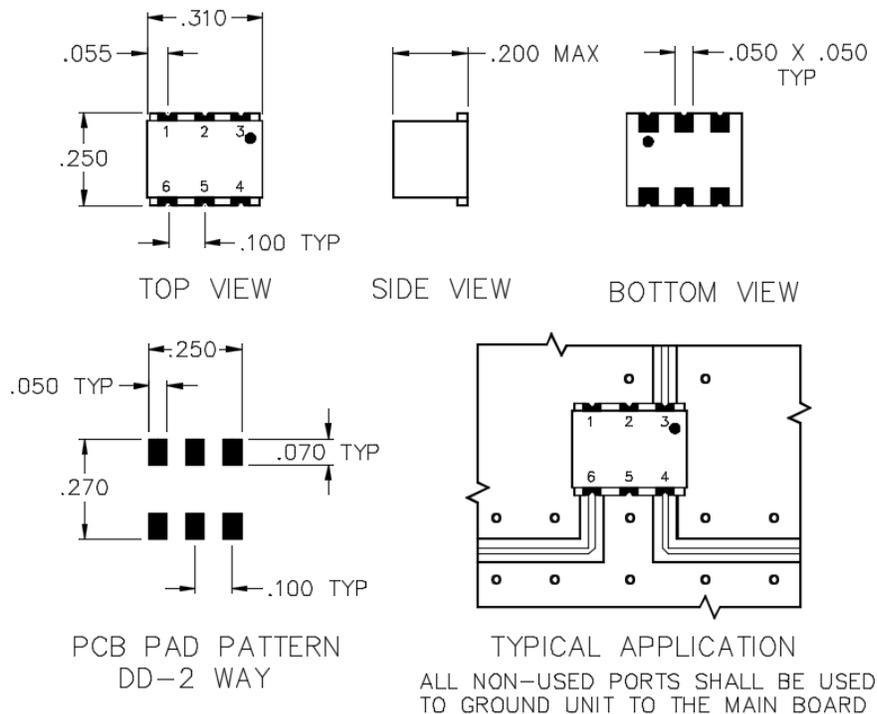

## SPECIFICATIONS

Name:	P2-12-DD
Frequency Range:	800-1000 MHz
Insertion Loss:	0.6 dB max.
Isolation:	25 dB min.
Amplitude Balance:	0.2 dB max.
Phase Balance:	2° max.
VSWR:	1.20:1 max.
Input Power:	1 watts max.
Package Type:	Surface

## PORT CONFIGURATION

Input:	6
Output:	4, 3
Ground:	1, 2, 5

Input power is specified for load VSWR better than 1.20:1.  
75 Ohm and higher power models available, contact sales.

This is a commercial off the shelf (COTS) product.  
For an equivalent product that meets DFARS materials compliance, contact sales.  
All specifications are subject to change without notice at any time. Rev: 160203