


# P2-13-D

## 2-WAY SURFACE MOUNT POWER DIVIDER

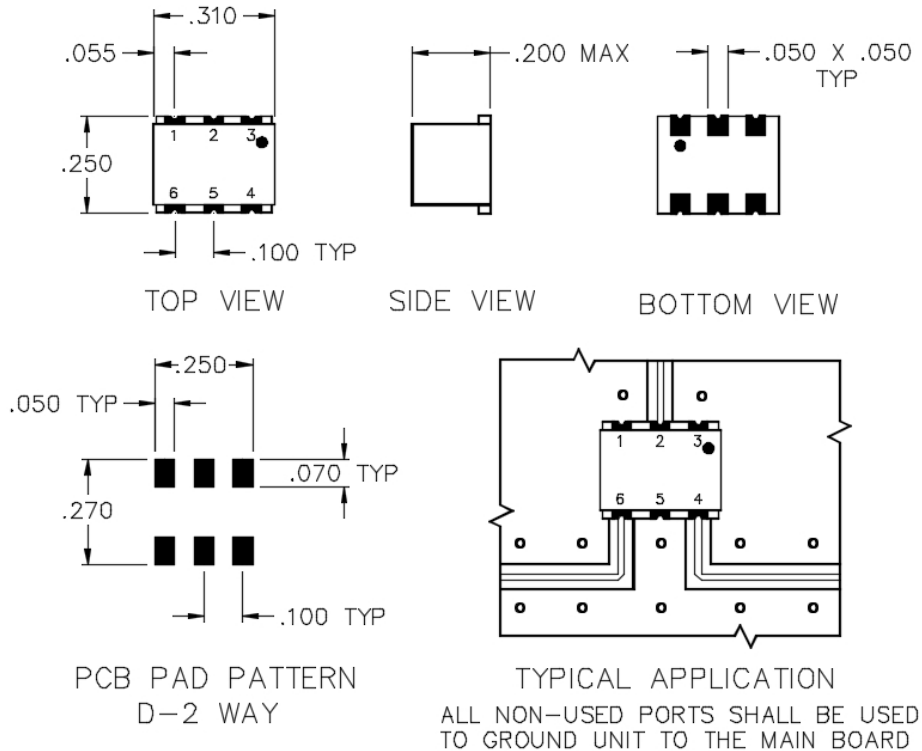

## SPECIFICATIONS

|                    |              |
|--------------------|--------------|
| Name:              | P2-13-D      |
| Frequency Range:   | 5-1500 MHz   |
| Insertion Loss:    | 1.4 dB max.  |
| Isolation:         | 20 dB min.   |
| Amplitude Balance: | 0.3 dB max.  |
| Phase Balance:     | 4° max.      |
| VSWR:              | 1.50:1 max.  |
| Input Power:       | 1 watts max. |
| Package Type:      | Surface      |

Input power is specified for load VSWR better than 1.20:1.  
75 Ohm and higher power models available, contact sales.

This is a commercial off the shelf (COTS) product.  
For an equivalent product that meets DFARS materials compliance, contact sales.  
All specifications are subject to change without notice at any time. Rev: 160203